

General characteristics

The multipole connectors for industrial purposes are used in electric and electronic machinery, robots, electric panels, control equipments and wherever connections are required for power, control and signal circuits. The connectors are designed for heavy-duty industrial applications. They are suitable for use with alternate or direct current and facilitate the manufacturing process, installation and maintenance of sectional electric parts in complex machinery in accordance with European Standard EN 60204-1

Referring standards:

EN 61984:	Connectors safety requirements and tests
VDE 0627:	Connectors (DIN VDE 0627)
EN 60664-1:	Insulation coordination for equipment within low-voltage systems
EN 175 301-801	High density rectangular connectors, round removable crimp contacts
EN 60947-7-1 part 7-1	Low-voltage switchgear and controlgear. Ancillary equipments - Terminal blocks for copper conductors
VDE 0110:	Table 4 concerning clearance and creepage distances
EN 60512:	Connectors for electronic equipments. Tests and measurements
UL 1977:	Component connectors for use in data, signal, control and power applications
CSA . C22.2 No. 182.3:	Special use attachment, plugs, receptacles and connectors
EN 60529:	Degree of protection provided by enclosures (IP degree)
EN 50262:	Metric cable glands for electrical installation
EN 60423:	Conduits for electrical purposes. Outside diameters of conduits for electrical installations and thread for conduits and fittings
ISO 23570-2:	Industrial automation system and integration. Distributed installation in industrial applications. Part 2: Hybrid communication bus
ISO 23570-3:	Industrial automation system and integration. Distributed installation in industrial applications. Part 3: Power distribution bus

DESINA ® specifications



Approvals:

UL, CSA., c

The inserts are designed and manufactured to conform with EN 61984, (IEC 61984), VDE 0627 and UL 1977/CSA C22.2 182.3 standards. They are certified and labelled with the UL and CSA marks.

The Westec connectors are therefore in conformance with both European/International and American system. This permits them to be used in a wider range of applications worldwide.

Inserts:

The inserts are made of self-extinguishing thermoplastic resin UL 94 V0, GWT 960°, normally used in maximum temperature of 125°C. The inserts are available in screw, spring, crimp and screw form with terminal block connections. The contacts are in silver or gold plated copper alloy. All are numbered on both sides by laser printing or molding in accordance with EN 60068-2-70.

- Suitable for use with alternate or direct current
- Leading protective ground
- Polarized for correct mating
- Interchangeable for male and female inserts in hoods and housings
- Captive screws
- Can be used with hoods and housings, or with rack and panel applications.

Conductors connection, termination:

- Screw terminals
- Crimp terminals
- Screw terminals with terminal block
- Spring terminals

Enclosures:

A large variety of enclosures are available with different combination of components and materials, each one suitable to a specific industrial installation for normal environmental conditions and aggressive environments.

The principal parts are made in die-cast aluminium alloy with a finishing of epoxy-polyester powder (nickel plated for EMC version) or in self extinguishing thermoplastic. They are resistant to impact and strong mechanical stress. Coupling stability and protection against accidental opening are assured by a single or double locking system, comprising of monoblock levers in galvanized steel or stainless steel, springs and pegs in stainless-steel or plastic.

Sealing is assured by special gaskets that protect the inserts inside the enclosures against dust, water and other aggressive agents.

- Innovative design
- Hoods/housings for normal environmental conditions and EMC
- Hoods/housings for harsh environmental requirements
- Degree of protection IP65 (EN 60529)
- Electrical connection with protective ground
- High mechanical strength and vibration resistance ensured by locking levers
- Spring-loaded lockable metal covers

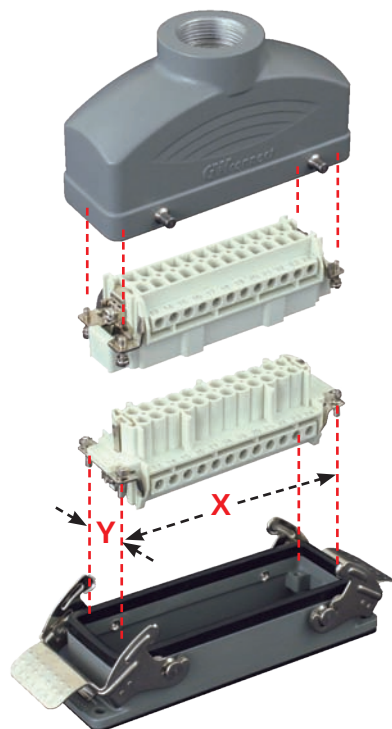
Cable glands, fittings and accessories:

- Extensive range of cable protection and sealing accessories
- Metal cable glands IP65
- Plastic cable glands IP65
- Metal cable glands IP68
- Plastic cable glands IP68
- Fittings for flexible conduits
- Hexagonal nuts
- Enlargers/reducers
- Code pins for incorrect mating protection

Technical features

- 1) A wide range of accessories comprising of: cable glands, fittings for flexible conduits, blanking plugs, enlargers, reducers and lock units.
- 2) Threaded cable passage in various Pg and metric thread (in accordance with EN 60423) available, for cable entry devices in accordance with EN 50262, as option located vertically, horizontally or at the front.
- 3) Heavy duty enclosures in die-cast aluminium alloy or self-extinguishing thermoplastic. Surface mounting or bulkhead housings and hoods are available, with or without fixed covers or with mobile protection covers. The enclosures for the use at a voltage of 500V have two tabs that prevents the insertion of inserts for the use with 830V. Those for the use with a rated voltage of 830V do not have any tabs and supplementary insulating strips are applied.
- 4) Metal enclosures powder coated with high resistance to mechanical stress and external agents, Enclosures used for harsh environments are treated with special epoxy powder coating.
- 5) Insert in self-extinguishing thermoplastic material reinforced with glass fibres, UL approved, with a limit working temperature from -40°C to $+125^{\circ}\text{C}$.
- 6) Inserts with asymmetric guide rails for preventing incorrect coupling, The inserts have a mechanical duration equal to or over 500 mating / unmating cycles.
- 7) Inserts manufactured to conform with EN 61984, VDE 0110, VDE 0627, EN 175301-801, UL 1977 standards. They are certified and labelled with the UL and CSA marks.
- 8) Special seal gaskets in anti-ageing, oil-resistant and fuel resistant vinyl nitrile elastomer or fluoro elastomer (for use in harsh environments) together with the joints provide an IP65 degree of protection for coupled connectors.
- 9) Monoblock galvanized steel or stainless steel or self-extinguishing glass filled thermoplastic material locking levers guarantee a perfect closure and sealing.
- 10) Locking device available in two versions, simple (with one lever) or double (with two levers).
- 11) Unlosable insert fastening screw, with anti-loosening flexible washer.
- 12) Contacts position identified with numbers on both sides of each insert and laser printed or moulded.
- 13) Contacts in silver or gold-plated copper alloy with connection to the conductors made via unlosable screws, crimping terminals, spring terminals or screws with incorporated terminal block.
- 14) Earth terminal with wide contact surface.
- 15) Stainless steel pegs that facilitate the locking and eliminate damages.
- 16) Unlosable contact screw in stainless steel material, stainless steel wire protector.
- 17) CE marking attesting to conform to the requirements of the Low Voltage Device (LVD) 73/23/EEC Directive and its modifications 93/68/EEC.

Size and identification of enclosures and inserts



Size and identification of the enclosures and inserts

There are a large number of connector inserts and their relative enclosures so the selection of a correct combination may be complex.




To facilitate this operation as well as the normal item/part No., a further identification parameter has been introduced: the "size" value.







The "size" value refers to the screw fixing centre distances which constitute a unique element since they are common to both the inserts and enclosures. This is as indicated in the above illustration and the table below.

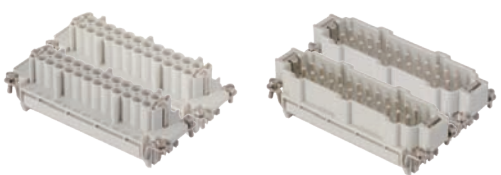



The following table shows all the sizes of the enclosures and the dimensions of the housings where the inserts will be assembled.













Type	Enclosure «Size» identification	Housing space for inserts with screw fixing centre distance x-y
3A	«21 x 21»	(21 x 21mm) *
10A	«49x16»	49,5 x 16 mm
16A	«66x16»	66 x 16 mm
32A	«66 x 40»	66 x 40 mm (2 inserts)
6B	«44 x 27»	44 x 27 mm
10B	«57 x 27»	57 x 27 mm
16B	«77 x 27»	77,5 x 27 mm
24B	«104 x 27»	104 x 27 mm
32B	«77 x 62»	77,5 x 27 mm (2 inserts)
48B	«104 x 62»	104 x 27 mm (2 inserts)
QD	«32 x 13»	32,2 x 13,4 mm



* The screw fixing centre distance cannot be given because they only have one screw: «21 x 21» indicates the size of the sectioned insert.


Series	S-A 10A 230V/400V 4kV 3 			
No. of poles	3p + ⊕	3p + ⊕	4p + ⊕	4p + ⊕
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Color	Grey	Black	Grey	Black
Size	3A «21x21»	3A «21x21»	3A «21x21»	3A «21x21»
Terminal	Screw	Screw	Screw	Screw
Wire section mm²/AWG	0,5÷2,5 / 20-14	0,5÷2,5 / 20-14	0,5÷2,5 / 20-14	0,5÷2,5 / 20-14
Numbering	1- 3	1- 3	1- 4	1- 4
Female insert	7203.6001.0	7203.6001.1	7204.6002.0	7204.6002.1
Male insert	7203.6101.0	7203.6101.1	7204.6102.0	7204.6102.1
Series	S-A 16A 250V 4kV 3 			
No. of poles	10p + ⊕	10p + ⊕	16p + ⊕	16p + ⊕
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977 Euromap				
Size	10A «49x16»	10A «49x16»	16A «66x16»	16A «66x16»
Terminal	Screw	Crimp	Screw	Crimp
Wire section mm²/AWG	0,5÷2,5 / 20-14	0,14÷4 / 26-12	0,5÷2,5 / 20-14	0,14÷4 / 26-12
Numbering	1-10	1-10	1-16	1-16
Female insert	7210.4401.0	7210.4451.0	7216.4402.0	7216.4452.0
Male insert	7210.4411.0	7210.4461.0	7216.4412.0	7216.4462.0
Series	S-A 16A 250V 4kV 3 			
No. of poles	32p + ⊕		32p + ⊕	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977 Euromap				
Size	32A «66x40»		32A «66x40»	
Terminal	Screw		Crimp	
Wire section mm²/AWG	0,5÷2,5 / 20-14		0,14÷4 / 26-12	
Numbering	1-16	17-32	1-16	17-32
Female insert	7216.4402.0	7216.4403.0	7216.4452.0	7216.4453.0
Male insert	7216.4412.0	7216.4413.0	7216.4462.0	7216.4463.0
Series	S-E 16A 500V 6kV 3 			
No. of poles	6p + ⊕	10p + ⊕	16p + ⊕	24p + ⊕
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	6B «44x27»	10B «57x27»	16B «77x27»	24B «104x27»
Terminal	Screw	Screw	Screw	Screw
Wire section mm²/AWG	0,5÷2,5 / 20-14	0,5÷2,5 / 20-14	0,5÷2,5 / 20-14	0,5÷2,5 / 20-14
Numbering	1-6	1-10	1-16	1-24
Female insert	7306.6003.0	7310.6004.0	7316.6005.0	7324.6007.0
Male insert	7306.6103.0	7310.6104.0	7316.6105.0	7324.6107.0











Series	S-E 16A 500V 6kV 3				UL (UL, CSA), RoHS
No. of poles	32p + 		48p + 		
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977	 		 		
Size	32B «77x62»		48B «104x62»		
Terminal	Screw		Screw		
Wire section mm²/AWG	0,5÷2,5 / 20-14		0,5÷2,5 / 20-14		
Numbering	1-16	17-32	1-24	25-48	
Female insert	7316.6005.0	7316.6006.0	7324.6007.0	7324.6008.0	
Male insert	7316.6105.0	7316.6106.0	7324.6107.0	7324.6108.0	
Series	S-E 16A 500V 6kV 3				UL (UL, CSA), RoHS
No. of poles	6p + 	10p + 	16p + 	24p + 	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977					
Size	6B «44x27»	10B «57x27»	16B «77x27»	24B «104x27»	
Terminal	Crimp	Crimp	Crimp	Crimp	
Wire section mm²/AWG	0,14-4 / 26-12	0,14-4 / 26-12	0,14-4 / 26-12	0,14-4 / 26-12	
Numbering	1-6	1-10	1-16	1-24	
Female insert	7306.6061.0	7310.6062.0	7316.6063.0	7324.6065.0	
Male insert	7306.6161.0	7310.6162.0	7316.6163.0	7324.6165.0	
Series	S-E 16A 500V 6kV 3				UL (UL, CSA), RoHS
No. of poles	32p + 		48p + 		
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977	 		 		
Size	32B «77x62»		48B «104x62»		
Terminal	Crimp		Crimp		
Wire section mm²/AWG	0,14÷4 / 26-12		0,14÷4 / 26-12		
Numbering	1-16	17-32	1-24	25-48	
Female insert	7316.6063.0	7316.6064.0	7324.6065.0	7324.6066.0	
Male insert	7316.6163.0	7316.6164.0	7324.6165.0	7324.6166.0	
Series	S-ES 16A 500V 6kV 3				UL (UL, CSA), RoHS
No. of poles	6p + 	10p + 	16p + 	24p + 	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977					
<i>New</i>					
Size	6B «44x27»	10B «57x27»	16B «77x27»	24B «104x27»	
Terminal	Spring	Spring	Spring	Spring	
Wire section mm²/AWG	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	
Numbering	1-6	1-10	1-16	1-24	
Female insert	7306.5851.0	7310.5852.0	7316.5853.0	7324.5855.0	
Male insert	7306.5951.0	7310.5952.0	7316.5953.0	7324.5955.0	


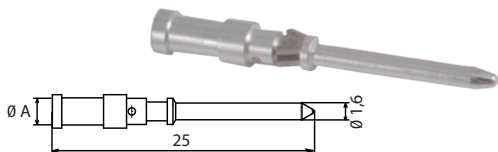

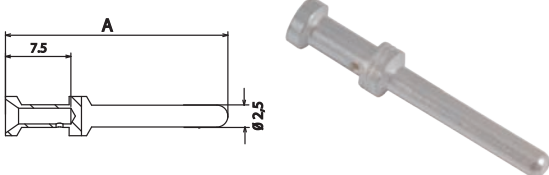
Series	S-ES 16A 500V 6kV 3				cUL _{US} (UL, CSA), CE (RoHS)
No. of poles	32p + ⊕		48p + ⊕		
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977					
Size	32B «77x62»		48B «104x62»		
Terminal	Spring		Spring		
Wire section mm²/AWG	0,14÷2,5 / 26-14		0,14÷2,5 / 26-14		
Numbering	1-16	17-32	1-24	25-48	
Female insert	7316.5853.0	7316.5854.0	7324.5855.0	7324.5856.0	
Male insert	7316.5953.0	7316.5954.0	7324.5955.0	7324.5956.0	
Series	S-EE 16A 500V 6kV 3				cUL _{US} (UL, CSA), CE (RoHS)
No. of poles	10p + ⊕	18p + ⊕	32p + ⊕	46p + ⊕	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977					
Size	6B «44x27»	10B «57x27»	16B «77x27»	24B «104x27»	
Terminal	Crimp	Crimp	Crimp	Crimp	
Wire section mm²/AWG	0,14÷4 / 26-12	0,14÷4 / 26-12	0,14÷4 / 26-12	0,14÷4 / 26-12	
Numbering	1-10	1-18	1-32	1-46	
Female insert	7310.6090.0	7318.6091.0	7332.6092.0	7346.6094.0	
Male insert	7310.6190.0	7318.6191.0	7332.6192.0	7346.6194.0	
Series	S-EE 16A 500V 6kV 3				cUL _{US} (UL, CSA), CE (RoHS)
No. of poles	64p + ⊕		92p + ⊕		
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977					
Size	32B «77x62»		48B «104x62»		
Terminal	Crimp		Crimp		
Wire section mm²/AWG	0,14÷4 / 26-12		0,14÷4 / 26-12		
Numbering	1-32	33-64	1-46	47-92	
Female insert	7332.6092.0	7332.6093.0	7346.6094.0	7346.6095.0	
Male insert	7332.6192.0	7332.6193.0	7346.6194.0	7346.6195.0	
Series	S-EAV 16A 500V 6kV 3				cUL _{US} (UL, CSA), CE (RoHS)
No. of poles	6p + ⊕ Left	6p + ⊕ Right	10p + ⊕ Left	10p + ⊕ Right	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977					
Size	6B «44x27»	10B «57x27»	16B «77x27»	24B «104x27»	
Terminal	Screw with terminal block	Screw with terminal block	Screw with terminal block	Screw with terminal block	
Wire section mm²/AWG	0,2÷2,5 / 24-14	0,2÷2,5 / 24-14	0,2÷2,5 / 24-14	0,2÷2,5 / 24-14	
Numbering	1-6	1-6	1-10	1-10	
Female insert	7406.6011.0	7406.6012.0	7410.6013.0	7410.6014.0	
Male insert	7406.6111.0	7406.6112.0	7410.6113.0	7410.6114.0	

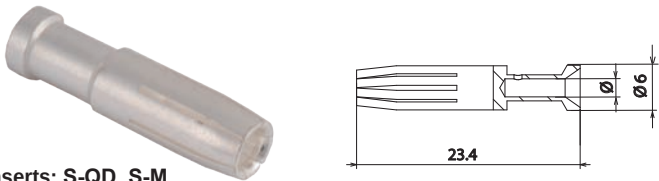
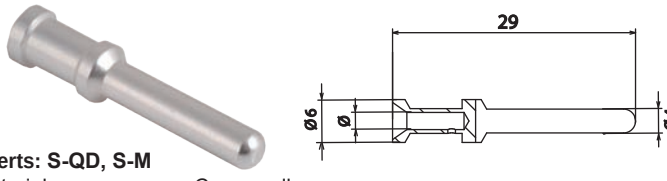
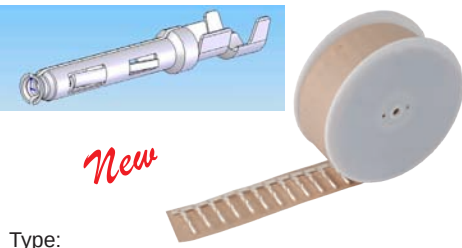
Series	S-EAV 16A 500V 6kV 3 			
No. of poles	16p + ⊕ Left	16p + ⊕ Right	24p + ⊕ Left	24p + ⊕ Right
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	16B «77x27»	16B «77x27»	24B «104x27»	24B «104x27»
Terminal	Screw with terminal block	Screw with terminal block	Screw with terminal block	Screw with terminal block
Wire section mm²/AWG	0,2÷2,5 / 24-14	0,2÷2,5 / 24-14	0,2÷2,5 / 24-14	0,2÷2,5 / 24-14
Numbering	1-16	1-16	1-24	1-24
Female insert	7416.6015.0	7416.6016.0	7424.6017.0	7424.6018.0
Male insert	7416.6115.0	7416.6116.0	7424.6117.0	7424.6118.0
Series	S-EHV 16A 830V 8kV 3 			
No. of poles	3p + ⊕ +2p	6p + ⊕ +2p	10p + ⊕ +2p	16p + ⊕ +2p
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	10B «57x27»	16B «77x27»	24B «104x27»	24B «104x27»
Terminal	Screw	Screw	Screw	Screw
Wire section mm²/AWG	0,5÷2,5 / 20-14	0,5÷2,5 / 20-14	0,5÷2,5 / 20-14	0,5÷2,5 / 20-14
Numbering	1-10	1-16	1-24	1-16
Female insert	7503.6031.0	7506.6032.0	7510.6033.0	7516.6034.0
Male insert	7503.6131.0	7506.6132.0	7510.6133.0	7516.6134.0
Series	S-EHV 16A 830V 8kV 3 			
No. of poles	12(6x2)p + ⊕ +4p		20(10x2)p + ⊕ +4p	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	32B «77x62»		48B «104x62»	
Terminal	Screw		Screw	
Wire section mm²/AWG	0,5÷2,5 / 20-14		0,5÷2,5 / 20-14	
Numbering	1-16	17-32	1-24	25-48
Female insert	7506.6032.0	7506.6052.0	7510.6033.0	7510.6053.0
Male insert	7506.6132.0	7506.6152.0	7510.6133.0	7510.6153.0
Series	S-EHV 16A 830V 8kV 3 			
No. of poles	32(16x2)p + ⊕ +2p	3p + ⊕ +2p	6p + ⊕ +2p	10p + ⊕ +2p
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	48B «104x62»	10B «57x27»	16B «77x27»	24B «104x27»
Terminal	Screw	Crimp	Crimp	Crimp
Wire section mm²/AWG	0,5÷2,5 / 20-14	0,14÷4 / 26-12	0,14÷4 / 26-12	0,14÷4 / 26-12
Numbering	1-16 17-32	1-10	1-16	1-24
Female insert	7516.6034.0 7516.6035.0	7503.6071.0	7506.6072.0	7510.6073.0
Male insert	7516.6134.0 7516.6135.0	7503.6171.0	7506.6172.0	7510.6173.0

Series	S-EHV 16A 830V 8kV 3			UL US (UL, CSA), CE (RoHS)
No. of poles	12(6x2)p + ⊕ +4p		20(10x2)p + ⊕ +4p	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977	 		 	
Size	32B «77x62»		48B «104x62»	
Terminal	Crimp		Crimp	
Wire section mm²/AWG	0,14 ÷ 4 / 26-12		0,14 ÷ 4 / 26-12	
Numbering	1-16	17-32	1-24	25-48
Female insert	7506.6072.0	7506.6082.0	7510.6073.0	7510.6083.0
Male insert	7506.6172.0	7506.6182.0	7510.6173.0	7510.6183.0
Series	S-ESHV 16A 830V 8kV 3			UL US (UL, CSA), CE (RoHS)
No. of poles	3p + ⊕ +2p	6p + ⊕ +2p	10p + ⊕ +2p	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977	 			
<i>New</i>				
Size	10B «57x27»		24B «104x27»	
Terminal	Spring		Spring	
Wire section mm²/AWG	0,14 ÷ 2,5 / 26-14		0,14 ÷ 2,5 / 26-14	
Numbering	1-10	1-16	1-24	
Female insert	7503.5831.0	7506.5832.0	7510.5833.0	
Male insert	7503.5931.0	7506.8932.0	7510.5933.0	
Series	S-ESHV 16A 830V 8kV 3			UL US (UL, CSA), CE (RoHS)
No. of poles	12(6x2)p + ⊕ +4p		20(10x2)p + ⊕ +4p	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977	 		 	
<i>New</i>				
Size	32B «77x62»		48B «104x62»	
Terminal	Spring		Spring	
Wire section mm²/AWG	0,14 ÷ 2,5 / 26-14		0,14 ÷ 2,5 / 26-14	
Numbering	1-16	17-32	1-24	25-48
Female insert	7506.5832.0	7506.5834.0	7510.5833.0	7510.5835.0
Male insert	7506.5932.0	7506.5934.0	7510.5933.0	7510.5935.0
Series	S-HSB 35A 830V 6kV 3			UL US (UL, CSA), CE (RoHS)
No. of poles	6p + ⊕	6p + ⊕	12p + ⊕	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977	 		 	
Size	16B «77x27»		32B «77x62»	
Terminal	Screw		Screw	
Wire section mm²/AWG	1,5 ÷ 6 / 16-10		1,5 ÷ 6 / 16-10	
Numbering	1-6	1-6	1-6	7-12
Female insert	7306.6041.0		7306.6041.0	7306.6042.0
Male insert			7306.6141.0	7306.6142.0

Series	S-K		S-K			
	Power 80A 830V/8kV/3 Signal 16A 400V/6kV/3		Power 80A 500V/8kV/3 Signal 16A 500V/6kV/3			
No. of poles	4p x 80A + ⊕ - 4p x 80A + 2p x 16A + ⊕		4p x 80A + 8p x 16A + ⊕			
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977	 		 			
UL, (UL, CSA) CE RoHS						
Size	16B «77x27»		24B «104x27»			
Terminal	Screw		Screw			
Wire section mm²/AWG	Power 1,5 ÷ 16/16÷5 - Signal 0,5 ÷ 2,5/20-14		Power 1,5 ÷ 16/16-5 - Signal 0,5 ÷ 2,5/20-14			
Numbering	1-4		7312.6043.0			
Female insert	7304.6044.0		7312.6143.0			
Male insert	7304.6144.0					
	7306.6145.0					
Series	S-Q 5/0	16A	230V/400V/4kV/3	S-Q 12	10A	400V/4kV/3
No. of poles	5p + ⊕ <i>New</i>			12p + ⊕ <i>New</i>		
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977	 			 		
UL, (UL, CSA) CE RoHS						
Size	3A «21x21»			3A «21x21»		
Terminal	Crimp			Crimp		
Wire section mm²/AWG	0,14 ÷ 2,5 / 26-14			0,14 ÷ 2,5 / 26-14		
Numbering	1-5			1-12		
Female insert	7605.5801.0			7612.5805.0		
Male insert	7605.5901.0			7612.5905.0		
Series	S-Q 8/0	16A	500V/6kV/3	S-Q 17	10A	250V/4kV/3
No. of poles	8p + ⊕ <i>New</i>			17p + ⊕ <i>New</i>		
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977	 			 		
UL, (UL, CSA), CE RoHS						
Size	«32x13»			«32x13»		
Terminal	Crimp			Crimp		
Wire section mm²/AWG	0,14 ÷ 4 / 26-12			0,14 ÷ 2,5 / 26-14		
Numbering	1-8			1-17		
Female insert	7608.5807.0			7617.5811.0		
Male insert	7608.5907.0			7617.5911.0		
Series	S-QD					
	Power 40A 400V/690V/4kV/3 Signal 10A 250V/4kV/3					
No. of poles	4p x 40A + 2p x 10A + ⊕ <i>New</i>					
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977	 					
UL, (UL, CSA), CE RoHS						
Size	«32x13»					
Terminal	Crimp					
Wire section mm²/AWG	Power 1,5 ÷ 6/16-10 - Signal 0,14 ÷ 2,5/26-14					
Numbering	1-4					
Female insert	7606.5815.0					
Male insert	7606.5915.0					

Series	S-D 10A 50V/0,8kV/3	S-D 10A 250V/4kV/3	UL (UL, CSA), CE (RoHS)	
No. of poles	8p	7p + ⊕	15p + ⊕	25p + ⊕
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	3A «21x21»	3A «21x21»	10A «49x16»	16A «66x16»
Terminal	Crimp	Crimp	Crimp	Crimp
Wire section mm²/AWG	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14
Numbering	1-8	1-7 Grey Black	1-15	1-25
Female insert	7108.4002.0	7107.4001.0 7107.4001.1	7115.4006.0	7125.4012.0
Male insert	7108.4102.0	7107.4101.0 7107.4101.1	7115.4106.0	7125.4112.0
Series	S-D 10A 250V/4kV/3	UL (UL, CSA), CE (RoHS)		
No. of poles	40p + ⊕	50p (25x2) + ⊕	64p + ⊕	80p (40x2) + ⊕
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	16B «77x27»	32A «66x40»	24B «104x27»	32B «77x62»
Terminal	Crimp	Crimp	Crimp	Crimp
Wire section mm²/AWG	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14
Numbering	1-40	1-25 Euromap	1-64	1-40
Female insert	7140.4018.0	7125.4012.0 7125.4012.3	7164.4024.0	7140.4018.0 x 2
Male insert	7140.4118.0	7125.4112.0 7125.4112.3	7164.4124.0	7140.4118.0 x 2
Series	S-D / S-DD 10A 250V/4kV/3	UL (UL, CSA), CE (RoHS)		
No. of poles	S-D 128(64x2)p + ⊕	S-DD 24p + ⊕	S-DD 42p + ⊕	S-DD 72p + ⊕
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	48B «104x62»	6B «44x27»	10B «57x27»	16B «77x27»
Terminal	Crimp	Crimp	Crimp	Crimp
Wire section mm²/AWG	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14
Numbering	1-64	1-24	1-42	1-72
Female insert	7164.4024.0 x 2	7124.4040.0	7142.4046.0	7172.4052.0
Male insert	7164.4124.0 x 2	7124.4140.0	7142.4146.0	7172.4152.0
Series	S-DD 10A 250V/4kV/3	UL (UL, CSA), CE (RoHS)		
No. of poles	108p + ⊕	144(72x2)p + ⊕	216(108x2)p + ⊕	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	24B «104x27»	32B «77x62»	48B «104x62»	
Terminal	Crimp	Crimp	Crimp	
Wire section mm²/AWG	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	
Numbering	1-108	1-72 73-144	1-108 109-216	
Female insert	7108.4058.0	7172.4052.0 7172.4053.0	7108.4058.0 7108.4059.0	
Male insert	7108.4158.0	7172.4152.0 7172.4153.0	7108.4158.0 7108.4159.0	

Female crimp contacts, machined, 10A	Stripping length	Numbering	Ø A	Wire mm²	Wire gauge	Part No.							
						Silver plated	Gold plated						
 For inserts: S-D, S-DD, S-Q, S-QD, S-M - Material: Copper alloy - Surface: Hard silver or hard gold	8	1	0,90	0.14 - 0.37	26-22 AWG	7100.4201.0	7100.4201.1						
	8	2	1,10	0.5	20 AWG	7100.4202.0	7100.4202.1						
	8	2	1,30	0.75	18 AWG	7100.4203.0	7100.4203.1						
	8	3	1,45	1.0	18 AWG	7100.4204.0	7100.4204.1						
	8	4	1,75	1.5	16 AWG	7100.4205.0	7100.4205.1						
	6	5	2,25	2.5	14 AWG	7100.4206.0	7100.4206.1						
Male crimp contacts, machined, 10A	Stripping length	Numbering	Ø A	Wire mm²	Wire gauge	Part No.							
						Silver plated	Gold plated						
 For inserts: S-D, S-DD, S-Q, S-QD, S-M - Material: Copper alloy - Surface: Hard silver or hard gold	8	1	0,90	0.14 - 0.37	26-22 AWG	7100.4211.0	7100.4211.1						
	8	2	1,10	0.5	20 AWG	7100.4212.0	7100.4212.1						
	8	2	1,30	0.75	18 AWG	7100.4213.0	7100.4213.1						
	8	3	1,45	1.0	18 AWG	7100.4214.0	7100.4214.1						
	8	4	1,75	1.5	16 AWG	7100.4215.0	7100.4215.1						
	6	5	2,25	2.5	14 AWG	7100.4216.0	7100.4216.1						
Female crimp contacts, machined, 16A			No. of grooves	Wire mm²	Wire gauge	Part No.							
						Silver plated	Gold plated						
 For inserts: S-A, S-E, S-EE, S-EHV, S-Q, S-QD, S-M - Material: Copper alloy - Surface: Hard silver or hard gold - Stripping length: 7,5 mm - Identification: By Grooves			0	0.14 - 0.37	26-22 AWG	7300.6240.0	7300.6240.1						
			0	0.5	20 AWG	7300.6241.0	7300.6241.1						
			1	0.75	18 AWG	7300.6239.0	7300.6239.1						
			1	1.0	18 AWG	7300.6242.0	7300.6242.1						
			2	1.5	16 AWG	7300.6243.0	7300.6243.1						
			3	2.5	14 AWG	7300.6244.0	7300.6244.1						
			1 Wide	3.0	12 AWG	7300.6238.0	7300.6238.1						
			0	4.0	12 AWG	7300.6245.0	7300.6245.1						
Male crimp contacts, machined, 16A		Type	No. of grooves	Wire mm²	Wire gauge	Part No.							
						Silver plated	Gold plated						
 <table border="1" data-bbox="467 1662 678 1774"><tr><th>Type</th><th>A</th></tr><tr><td>S</td><td>25</td></tr><tr><td>R</td><td>22,8</td></tr></table> For inserts: S-A, S-E, S-EE, S-EHV, S-Q, S-QD, S-M - Material: Copper alloy - Surface: Hard silver or hard gold - Stripping length: 7,5 mm - Identification: By grooves - Type: S R		Type	A	S	25	R	22,8	S	0	0.14 - 0.37	26-22 AWG	7300.6237.0	7300.6237.1
		Type	A										
		S	25										
		R	22,8										
		S	0	0.5	20 AWG	7300.6246.0	7300.6246.1						
		S	1	0.75	18 AWG	7300.6236.0	7300.6236.1						
		S	1	1.0	18 AWG	7300.6247.0	7300.6247.1						
		S	2	1.5	16 AWG	7300.6248.0	7300.6248.1						
		S	3	2.5	14 AWG	7300.6249.0	7300.6249.1						
		S	1 Wide	3.0	12 AWG	7300.6235.0	7300.6235.1						
		S	0	4.0	12 AWG	7300.6250.0	7300.6250.1						
		R	0	0.5	20 AWG	7300.6255.0	7300.6255.1						
		R	1	0.75	18 AWG	7300.6234.0	7300.6234.1						
		R	1	1.0	18 AWG	7300.6256.0	7300.6256.1						
		R	2	1.5	16 AWG	7300.6257.0	7300.6257.1						
		R	3	2.5	14 AWG	7300.6258.0	7300.6258.1						

40A female crimp contacts, machined				Stripping length	Ø	Wire mm²	Wire gauge	Part.No.
								Silver plated
 For inserts: S-QD, S-M - Material: Copper alloy - Surface: Hard silver				9	1,75	1,5	16 AWG	7600.5700.0
				9	2,25	2.5	14 AWG	7600.5701.0
				9,6	2,85	4.0	12 AWG	7600.5702.0
				9,6	3,5	6.0	10 AWG	7600.5703.0
40A male crimp contacts, machined				Stripping length	Ø	Wire mm²	Wire gauge	Part.No.
								Silver plated
 For inserts: S-QD, S-M - Material: Copper alloy - Surface: Hard silver				9	1,75	1,5	16 AWG	7600.5710.0
				9	2,25	2.5	14 AWG	7600.5711.0
				9,6	2,85	4.0	12 AWG	7600.5712.0
				9,6	3,5	6.0	10 AWG	7600.5713.0
10A male crimp contacts, stamped		Packing	Type	Wire mm²	Wire gauge	Part No.		
						Silver plated	Tin plated	Gold plated
 <i>New</i> Type: - A: Single contact - B: On reel for hand crimp tool - C: On reel for crimp machine - Material: Copper alloy - Surface: Hard silver or hard gold or tin plated - Stripping length: 3,5 mm For inserts: S-D, S-DD, S-Q, S-QD, S-M		100	A	0.14 - 0.5	26-20 AWG	7100.4031.0	7100.4031.2	7100.4031.1
		200	B	0.14 - 0.5	26-20 AWG	7100.4032.0	7100.4032.2	7100.4032.1
		2000	C	0.14 - 0.5	26-20 AWG	7100.4033.0	7100.4033.2	7100.4033.1
		100	A	0.5 - 1.5	20-16 AWG	7100.4034.0	7100.4034.2	7100.4034.1
		200	B	0.5 - 1.5	20-16 AWG	7100.4035.0	7100.4035.2	7100.4035.1
		2000	C	0.5 - 1.5	20-16 AWG	7100.4036.0	7100.4036.2	7100.4036.1
		100	A	1.5 - 2.5	16-14 AWG	7100.4037.0	7100.4037.2	7100.4037.1
		200	B	1.5 - 2.5	16-14 AWG	7100.4038.0	7100.4038.2	7100.4038.1
		2000	C	1.5 - 2.5	16-14 AWG	7100.4039.0	7100.4039.2	7100.4039.1
10A male crimp contacts, stamped		Packing	Type	Wire mm²	Wire gauge	Part No.		
						Silver plated	Tin plated	Gold plated
 <i>New</i> Type: - A: Single contact - B: On reel for hand crimp tool - C: On reel for crimp machine - Material: Copper alloy - Surface: Hard silver or hard gold or tin plated - Stripping length: 3,5 mm For inserts: S-D, S-DD, S-Q, S-QD, S-M		100	A	0.14 - 0.5	26-20 AWG	7100.4071.0	7100.4071.2	7100.4071.1
		200	B	0.14 - 0.5	26-20 AWG	7100.4072.0	7100.4072.2	7100.4072.1
		2000	C	0.14 - 0.5	26-20 AWG	7100.4073.0	7100.4073.2	7100.4073.1
		100	A	0.5 - 1.5	20-16 AWG	7100.4074.0	7100.4074.2	7100.4074.1
		200	B	0.5 - 1.5	20-16 AWG	7100.4075.0	7100.4075.2	7100.4075.1
		2000	C	0.5 - 1.5	20-16 AWG	7100.4076.0	7100.4076.2	7100.4076.1
		100	A	1.5 - 2.5	16-14 AWG	7100.4077.0	7100.4077.2	7100.4077.1
		200	B	1.5 - 2.5	16-14 AWG	7100.4078.0	7100.4078.2	7100.4078.1
		2000	C	1.5 - 2.5	16-14 AWG	7100.4079.0	7100.4079.2	7100.4079.1


Technical characteristics and application	Enclosures Part. No.																																				
- Types available: STD : For standard applications for inserts up to 250V or 500V, plastic type color RAL 9001 or Die cast aluminium alloy coated grey RAL 7037 STD-HV : For standard applications for inserts up to 830V Die cast aluminium alloy coated grey RAL 7037 HE : For harsh environmental requirements and inserts up to 250V or 500V, Die cast aluminium alloy coated black RAL 9005 HE-HV : For harsh environmental requirements and inserts up to 830V. Die cast aluminium alloy coated Black RAL 9005 EMC: For applications that require electromagnetic compatibility (EMC), for inserts up to 500V, Die cast aluminium alloy natural color - Single locking system (1 lever) - Double locking system (2 levers) - Reversed double locking system - Reversed single locking system size 6B «44x27» - With locking central lever - Hoods for round cables with Metric or Pg cable glands IP65 and IP68 - Hoods for ribbon cable with strain relief IP66 - Hoods with double top or frontal entries, double locking system - Surface mounting housings - Surface mounting housings with cover - Surface mounting housings with bottom entry - Bulkhead mounting housings - Bulkhead mounting housings with cover - Separated covers - SC - standard construction: with small dimensions - HC - high construction: bigger size for wider cable diameter - Limiting temperature: - 40°C ÷ + 125°C 	To facilitate the identification of the several versions of the enclosures, some digits of the part No. have a meaning in accordance with the following rules: Part No.: 78XX.ABCD.Y 78: Indicates the enclosures XX: Indicates the size in accordance with the following <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">XX = 03</td><td>Size 3A «21x21»</td></tr> <tr> <td>XX = 06</td><td>Size 6B «44x27»</td></tr> <tr> <td>XX = 10</td><td>Size 10A «49x16» and 10B «57x27»</td></tr> <tr> <td>XX = 13</td><td>Size QD «32x13»</td></tr> <tr> <td>XX = 16</td><td>Size 16A «66x16» and 16B «77x27»</td></tr> <tr> <td>XX = 24</td><td>Size 24B «104x27»</td></tr> <tr> <td>XX = 32</td><td>Size 32A «66x40» and 32B «77x62»</td></tr> <tr> <td>XX = 48</td><td>Size 48B «104x62»</td></tr> </table> ABCD: serial number without any particular meaning Y: Indicates the version in accordance the following <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Y = 0</td><td>STD series</td></tr> <tr> <td>Y = 1</td><td>HE series</td></tr> <tr> <td>Y = 2</td><td>STD - HV series for 830V inserts</td></tr> <tr> <td>Y = 3</td><td>HE - HV series for 830V inserts</td></tr> <tr> <td>Y = 4</td><td>EMC series</td></tr> <tr> <td>Y = 5</td><td>Hoods STD series without threaded fitting</td></tr> <tr> <td>Y = 6</td><td>Hoods HE series without threaded fitting</td></tr> <tr> <td>Y = 7</td><td>Hoods STD - HV series for 830V inserts without threaded fittings</td></tr> <tr> <td>Y = 8</td><td>Hoods HE-HV series for 830V inserts without threaded fittings</td></tr> <tr> <td>Y = 9</td><td>Hoods EMC without threaded fitting</td></tr> </table> Y = A,B,C etc. Other special enclosures Note: Part No. bold letters refer to standard availability. Normal letters refer to items on special request. For more technical details and the special enclosures STD-HV, HE, HE-HV, EMC series please consult the Westec General Catalogue	XX = 03	Size 3A «21x21»	XX = 06	Size 6B «44x27»	XX = 10	Size 10A «49x16» and 10B «57x27»	XX = 13	Size QD «32x13»	XX = 16	Size 16A «66x16» and 16B «77x27»	XX = 24	Size 24B «104x27»	XX = 32	Size 32A «66x40» and 32B «77x62»	XX = 48	Size 48B «104x62»	Y = 0	STD series	Y = 1	HE series	Y = 2	STD - HV series for 830V inserts	Y = 3	HE - HV series for 830V inserts	Y = 4	EMC series	Y = 5	Hoods STD series without threaded fitting	Y = 6	Hoods HE series without threaded fitting	Y = 7	Hoods STD - HV series for 830V inserts without threaded fittings	Y = 8	Hoods HE-HV series for 830V inserts without threaded fittings	Y = 9	Hoods EMC without threaded fitting
XX = 03	Size 3A «21x21»																																				
XX = 06	Size 6B «44x27»																																				
XX = 10	Size 10A «49x16» and 10B «57x27»																																				
XX = 13	Size QD «32x13»																																				
XX = 16	Size 16A «66x16» and 16B «77x27»																																				
XX = 24	Size 24B «104x27»																																				
XX = 32	Size 32A «66x40» and 32B «77x62»																																				
XX = 48	Size 48B «104x62»																																				
Y = 0	STD series																																				
Y = 1	HE series																																				
Y = 2	STD - HV series for 830V inserts																																				
Y = 3	HE - HV series for 830V inserts																																				
Y = 4	EMC series																																				
Y = 5	Hoods STD series without threaded fitting																																				
Y = 6	Hoods HE series without threaded fitting																																				
Y = 7	Hoods STD - HV series for 830V inserts without threaded fittings																																				
Y = 8	Hoods HE-HV series for 830V inserts without threaded fittings																																				
Y = 9	Hoods EMC without threaded fitting																																				

Hoods top entry			Hoods side entry			Hoods top entry with lever			Covers with gasket for female inserts		
 Plastic type  Metal type			 Plastic type  Metal type			 Plastic type  Metal type			 Plastic type  Metal type		
Size		Part No.	Size	Thread	Part No.	Size	Thread	Part No.	Size		Part No.
3A «21x21»	M 20	Grey plastic 7803.6227.0	3A «21x21»	M 20	Grey plastic 7803.6229.0	3A «21x21»	M 20	Grey plastic 7803.6231.0 7803.6211.0	3A «21x21»		Grey plastic 7803.6801.0
3A «21x21»	Pg 11	7803.6207.0	3A «21x21»	Pg 11	7803.6209.0	3A «21x21»	Pg 11	Black plastic 7803.6231.1 7803.6211.1	3A «21x21»		Black plastic 7803.6801.1
3A «21x21»	M 20	Black plastic 7803.6227.1	3A «21x21»	M 20	Black plastic 7803.6229.1	3A «21x21»	M 20	Metal 7803.6232.0 7803.6212.0	3A «21x21»		Metal 7803.6802.0
3A «21x21»	Pg 11	7803.6207.1	3A «21x21»	Pg 11	7803.6209.1	3A «21x21»	Pg 11	With inox lever 7803.6232.A 7803.6212.A			
3A «21x21»	M 20	Metal 7803.6228.0	3A «21x21»	M 20	Metal 7803.6230.0	3A «21x21»	M 20				
3A «21x21»	Pg 11	7803.6208.0	3A «21x21»	Pg 11	7803.6210.0	3A «21x21»	Pg 11				
Housings bulkhead mounting			Housings bulkhead mounting right angle			Housings surface mounting one side cable entry			Covers for male inserts		
 Plastic type  Metal type			 Plastic type  Metal type			 Plastic type  Metal type			 Plastic type  Metal type		
Size		Part No.	Size		Part No.	Size	Thread	Part No.	Size		Part No.
3A «21x21»		Grey plastic 7803.6201.0	3A «21x21»		Grey plastic 7803.6203.0	3A «21x21»	M 20	Grey plastic 7803.6225.0 7803.6205.0	3A «21x21»		Grey plastic 7803.6803.0
3A «21x21»		Black plastic 7803.6201.1	3A «21x21»		Black plastic 7803.6203.1	3A «21x21»	M 20	Black plastic 7803.6225.1 7803.6205.1	3A «21x21»		Black plastic 7803.6803.1
3A «21x21»		Metal 7803.6202.0	3A «21x21»		Metal 7803.6204.0	3A «21x21»	M 20	Metal 7803.6226.0 7803.6206.0	3A «21x21»		Metal 7803.6804.0
3A «21x21»	With inox lever	7803.6202.A	3A «21x21»	With inox lever	7803.6204.A	3A «21x21»	Pg 11	With inox lever 7803.6226.A 7803.6206.A			
Type: STD for inserts size 3A, S-A, S-D, S-Q series						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue			Accessories, cable glands and tools see page: 36 ÷ 42		

Surface mounting housings			Bulkhead mounting housings			Hoods with 2 pegs for one lever			Hoods Top entry with 2 pegs for one lever		
  With cover			  With cover			 Top entry  Side entry			 With threaded fitting Part No. "0"  Without threaded fitting Part No. "5" For IP68 cable glands HC - High construction		
Size	Thread	Part No.	Size		Part No.	Size	Thread	Part No.	Size	Thread	Part No.
10A «49x16»	M 20	7810.4501.0	10A «49x16»		7810.4541.0	10A «49x16» 10A «49x16» 10A «49x16» 10A «49x16» 10A «49x16» 10A «49x16» 16A «66x16» 16A «66x16» 16A «66x16» 16A «66x16»	M 20 M 25 Pg 13,5 Pg 16 M 20 M 25 Pg 13,5 Pg 16	Top entry 7810.4550.0 7810.4551.0 7810.4552.0 7810.4553.0 7816.4555.0 7816.4556.0 7816.4557.0 7816.4558.0	10A «49x16»	M 20	7810.4561.0
10A «49x16»	M 20X2	7810.4502.0	16A «66x16»		7816.4543.0				10A «49x16»	M 25	7810.4562.0
10A «49x16»	M 25	7810.4503.0							10A «49x16»	Pg 16	7810.4563.0
10A «49x16»	M 25X2	7810.4504.0							10A «49x16»	Pg 21	7810.4564.0
10A «49x16»	Pg 16	7810.4505.0	10A «49x16»		7810.4542.0						Without threaded fitting
10A «49x16»	Pg 16X2	7810.4506.0	16A «66x16»		7816.4544.0				10A «49x16»	M 20	7810.4561.5
10A «49x16»	Pg 21	7810.4507.0							10A «49x16»	M 25	7810.4562.5
10A «49x16»	Pg 21X2	7810.4508.0							10A «49x16»	Pg 16	7810.4563.5
16A «66x16»	M 20	7816.4521.0	Cover with 2 pegs Covers with one lever						16A «66x16»	Pg 21	7810.4564.5
16A «66x16»	M 20X2	7816.4522.0									
16A «66x16»	M 25	7816.4523.0	 			16A «66x16»	M 25	7816.4567.0			
16A «66x16»	M 25X2	7816.4524.0				10A «49x16»	M 20	7810.4571.0			
16A «66x16»	Pg 16	7816.4525.0				10A «49x16»	M 25	7810.4572.0			
16A «66x16»	Pg 16X2	7816.4526.0				10A «49x16»	Pg 16	7810.4573.0			
16A «66x16»	Pg 21	7816.4527.0				16A «66x16»	M 20	7816.4575.0			
16A «66x16»	Pg 21X2	7816.4528.0				16A «66x16»	M 25	7816.4576.0			
		With cover				16A «66x16»	Pg 16	7816.4577.0			
10A «49x16»	M 20	7810.4511.0							16A «66x16»	M 20	7816.4566.5
10A «49x16»	M 20X2	7810.4512.0							16A «66x16»	M 25	7816.4567.5
10A «49x16»	M 25	7810.4513.0							16A «66x16»	Pg 16	7816.4568.5
10A «49x16»	M 25X2	7810.4514.0				16A «66x16»	Pg 21	7816.4569.5			
10A «49x16»	Pg 16	7810.4515.0						* Without cable entry			
10A «49x16»	Pg 16X2	7810.4516.0				10A «49x16»	*	7810.4565.0			
10A «49x16»	Pg 21	7810.4517.0				16A «66x16»	*	7816.4570.0			
10A «49x16»	Pg 21X2	7810.4518.0									
16A «66x16»	M 20	7816.4531.0			Cover with 2 pegs and gasket for housings with one lever						
16A «66x16»	M 20X2	7816.4532.0	10A «49x16»		7810.4591.0						
16A «66x16»	M 25	7816.4533.0	16A «66x16»		7816.4592.0						
16A «66x16»	M 25X2	7816.4534.0			Cover with one lever for hoods with 2 pegs						
16A «66x16»	Pg 16	7816.4535.0			7810.4594.0						
16A «66x16»	Pg 16X2	7816.4536.0	10A «49x16»		7816.4595.0						
16A «66x16»	Pg 21	7816.4537.0	16A «66x16»								
16A «66x16»	Pg 21X2	7816.4538.0									
Type: STD for inserts size 10A and 16A, S-A, S-D series						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue			Accessories, cable glands and tools see page: 36 ÷ 42		

Hoods side entry with 2 pegs for one lever			Surface mounting housings double locking			Bulkhead mounting housings double locking			Hoods top entry with 4 pegs for 2 levers		
 With threaded fitting part No. "0"  Without threaded fitting part No. "5" For IP68 cable glands HC - High construction			 			 			 With threaded fitting part No. "0"  Without threaded fitting part No. "5" For IP68 cable glands HC - High construction		
Size	Thread	Part No.	Size	Thread	Part No.	Size		Part No.	Size	Thread	Part No.
10A «49x16»	M 20	HC-With threaded fitting 7810.4581.0	32A «66x40»	M 25	With double levers 7832.4600.0	32A «66x40»		With double levers 7832.4631.0	32A «66x40»	M 25	HC-With threaded fitting 7832.4641.0
10A «49x16»	M 25	7810.4582.0	32A «66x40»	M 25X2	7832.4601.0			Reversed with 4 pegs and cover 7832.4633.0	32A «66x40»	M 32	7832.4642.0
10A «49x16»	Pg 16	7810.4583.0	32A «66x40»	M 32	7832.4602.0				32A «66x40»	Pg 21	7832.4643.0
10A «49x16»	Pg 21	7810.4584.0	32A «66x40»	M 32X2	7832.4603.0	32A «66x40»			32A «66x40»	Pg 29	7832.4644.0
		HC-Without threaded fitting	32A «66x40»	M 40	7832.4604.0						
10A «49x16»	M 20	7810.4581.5	32A «66x40»	M 40x2	7832.4605.0				32A «66x40»	M 25	HC-Without threaded fitting 7832.4641.5
10A «49x16»	M 25	7810.4582.5	32A «66x40»	Pg 21	7832.4606.0				32A «66x40»	M 32	7832.4642.5
10A «49x16»	Pg 16	7810.4583.5	32A «66x40»	Pg 21X2	7832.4607.0				32A «66x40»	Pg 21	7832.4643.5
10A «49x16»	Pg 21	7810.4584.5	32A «66x40»	Pg 29	7832.4608.0				32A «66x40»	Pg 29	7832.4644.5
		HC-With threaded fitting	32A «66x40»	Pg 29X2	7832.4609.0						
					Reversed with 4 pegs and cover						
16A «66x16»	M 20	7816.4586.0	32A «66x40»	M 25	7832.4610.0						
16A «66x16»	M 25	7816.4587.0	32A «66x40»	M 25X2	7832.4611.0						
16A «66x16»	Pg 16	7816.4588.0	32A «66x40»	M 32	7832.4612.0						
16A «66x16»	Pg 21	7816.4589.0	32A «66x40»	M 32X2	7832.4613.0						
		HC-Without threaded fitting	32A «66x40»	M 40	7832.4614.0						
16A «66x16»	M 20	7816.4586.5	32A «66x40»	M 40x2	7832.4615.0						
16A «66x16»	M 25	7816.4587.5	32A «66x40»	Pg 21	7832.4616.0						
16A «66x16»	Pg 16	7816.4588.5	32A «66x40»	Pg 21X2	7832.4617.0						
16A «66x16»	Pg 21	7816.4589.5	32A «66x40»	Pg 29	7832.4618.0						
			32A «66x40»	Pg 29X2	7832.4619.0						
Type: STD for inserts size 10A, 16A, 32A, S-A, S-D series						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue			Accessories, cable glands and tools see page: 36 ÷ 42		

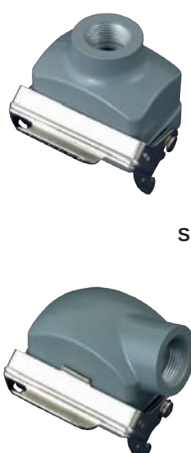
Hoods side entry with 4 pegs for 2 levers			Reversed locking hoods, top entry, with 2 tevers			Reversed locking hoods, side entry, with 2 tevers			Covers for double locking system				
 SC- Standard construction  HC- High construction. With threaded fitting part No. "0"  HC- High construction. Without threaded fitting part No. "5" For IP68 cable glands			 With threaded fitting part No. "0"  Without threaded fitting part No. "5" For IP68 cable glands HC - High construction			 SC- Standard construction  HC- High construction. With threaded fitting part No. "0"  HC- High construction. Without threaded fitting part No. "5" For IP68 cable glands			 With 4 pegs  With 2 levers and gasket				
Type	Thread	Part No.	Type	Thread	Part No.	Type	Thread	Part No.	Locking	Thread	Part No.		
SC - Standard construction	M 25	7832.4647.0	HC- High construction With threaded fitting	M 25	7832.4656.0	SC - Standard construction	M 25	7832.4661.0	With 4 pegs		7832.4671.0		
	M 32	7832.4648.0		M 32	7832.4657.0		M 32	7832.4662.0					
	Pg 21	7832.4649.0		Pg 21	7832.4658.0		Pg 21	7832.4663.0	With 2 levers and gasket		7832.4672.0		
HC- High construction With threaded fitting	M 25	7832.4651.0	HC- High construction Without threaded fitting For IP68 cable glands	Pg 29	7832.4659.0	HC- High construction With threaded fitting	M 25	7832.4665.0					
	M 32	7832.4652.0		M 25	7832.4656.5		M 32	7832.4666.0	Covers for reversed double locking system				
	Pg 21	7832.4653.0		M 32	7832.4657.5		Pg 21	7832.4667.0	 				
HC- High construction Without threaded fitting For IP68 cable glands	Pg 29	7832.4654.0	Pg 21	7832.4658.5	Pg 29	7832.4668.0							
	M 25	7832.4651.5	Pg 29	7832.4659.5	HC- High construction Without threaded fitting For IP68 cable glands	M 25	7832.4665.5	Locking				Part No.	
	M 32	7832.4652.5				M 32	7832.4666.5			With 4 pegs and gasket			7832.4673.0
Pg 21	7832.4653.5			Pg 21		7832.4667.5	With 2 levers without gasket		7832.4674.0				
Pg 29	7832.4654.5			Pg 29	7832.4668.5								
Type: STD for inserts size 32A, «66x40» S-A, S-D series						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue			Accessories, cable glands and tools see page: 36 ÷ 42				

Surface mounting housings			Surface mounting housings with cover			Bottom entry surface mounting housings			Bottom entry surface mounting housings with cover		
						With IP68 metal cable glands 			With IP68 metal cable glands 		
Size	Thread	Part No.	Size	Thread	Part No.	Size	Thread	Part No.	Size	Thread	Part No.
6B «44 x 27»	M 20	7806.6351.0	6B «44 x 27»	M 20	7806.6361.0	6B «44 x 27»	M 20	7806.7860.0	6B «44 x 27»	M 20	7806.7874.0
6B «44 x 27»	M 20X2	7806.6352.0	6B «44 x 27»	M 20X2	7806.6362.0	6B «44 x 27»	M 25	7806.7861.0	6B «44 x 27»	M 25	7806.7875.0
6B «44 x 27»	Pg 16	7806.6301.0	6B «44 x 27»	Pg 16	7806.6311.0						
6B «44 x 27»	Pg 16X2	7806.6302.0	6B «44 x 27»	Pg 16X2	7806.6312.0	10B «57 x 27»	M 20	7810.7862.0	10B «57 x 27»	M 20	7810.7876.0
10B «57 x 27»	M 20	7810.6353.0	10B «57 x 27»	M 20	7810.6363.0	10B «57 x 27»	M 25	7810.7863.0	10B «57 x 27»	M 25	7810.7877.0
10B «57 x 27»	M 20X2	7810.6354.0	10B «57 x 27»	M 20X2	7810.6364.0	16B «77 x 27»	M 20	7816.7864.0	16B «77 x 27»	M 20	7816.7878.0
10B «57 x 27»	Pg 16	7810.6303.0	10B «57 x 27»	Pg 16	7810.6313.0	16B «77 x 27»	M 25	7816.7865.0	16B «77 x 27»	M 25	7816.7879.0
10B «57 x 27»	Pg 16X2	7810.6304.0	10B «57 x 27»	Pg 16X2	7810.6314.0	24B «104 x 27»	M 20	7824.7866.0	24B «104 x 27»	M 20	7824.7880.0
16B «77 x 27»	M 25	7816.6355.0	16B «77 x 27»	M 25	7816.6365.0	24B «104 x 27»	M 25	7824.7867.0	24B «104 x 27»	M 25	7824.7881.0
16B «77 x 27»	M 25X2	7816.6356.0	16B «77 x 27»	M 25X2	7816.6366.0	32B «77 x 62»	M 32	7832.7868.0	32B «77 x 62»	M 32	7832.7882.0
16B «77 x 27»	Pg 21	7816.6305.0	16B «77 x 27»	Pg 21	7816.6315.0	32B «77 x 62»	M 40	7832.7869.0	32B «77 x 62»	M 40	7832.7883.0
16B «77 x 27»	Pg 21X2	7816.6306.0	16B «77 x 27»	Pg 21X2	7816.6316.0	32B «77 x 62»	M 50	7832.7870.0	32B «77 x 62»	M 50	7832.7884.0
24B «104 x 27»	M 25	7824.6357.0	24B «104 x 27»	M 25	7824.6367.0	48B «104 x 62»	M 32	7848.7871.0	48B «104 x 62»	M 32	7848.7885.0
24B «104 x 27»	M 25X2	7824.6358.0	24B «104 x 27»	M 25X2	7824.6368.0	48B «104 x 62»	M 40	7848.7872.0	48B «104 x 62»	M 40	7848.7886.0
24B «104 x 27»	Pg 21	7824.6307.0	24B «104 x 27»	Pg 21	7824.6317.0	48B «104 x 62»	M 50	7848.7873.0	48B «104 x 62»	M 50	7848.7887.0
24B «104 x 27»	Pg 21X2	7824.6308.0	24B «104 x 27»	Pg 21X2	7824.6318.0						
32B «77 x 62»	M 40	7832.6380.0	32B «77 x 62»	M 40	7832.6382.0						
32B «77 x 62»	M 40X2	7832.6381.0	32B «77 x 62»	M 40X2	7832.6383.0						
32B «77 x 62»	M 50	7832.6359.0	32B «77 x 62»	M 50	7832.6369.0						
32B «77 x 62»	M 50X2	7832.6360.0	32B «77 x 62»	M 50X2	7832.6370.0						
32B «77 x 62»	Pg 29	7832.6330.0	32B «77 x 62»	Pg 29	7832.6334.0						
32B «77 x 62»	Pg 29X2	7832.6331.0	32B «77 x 62»	Pg 29X2	7832.6335.0						
32B «77 x 62»	Pg 36	7832.6309.0	32B «77 x 62»	Pg 36	7832.6319.0						
32B «77 x 62»	Pg 36X2	7832.6310.0	32B «77 x 62»	Pg 36X2	7832.6320.0						
32B «77 x 62»	Pg 42	7832.6332.0	32B «77 x 62»	Pg 42	7832.6336.0						
32B «77 x 62»	Pg 42X2	7832.6333.0	32B «77 x 62»	Pg 42X2	7832.6337.0						
48B «104 x 62»	M 32X2	7848.7429.0	48B «104 x 62»	M 32X2	7848.7433.0						
48B «104 x 62»	M 40X2	7848.7430.0	48B «104 x 62»	M 40X2	7848.6386.0						
48B «104 x 62»	M 50X2	7848.7431.0	48B «104 x 62»	M 50X2	7848.6371.0						
48B «104 x 62»	Pg 29X2	7848.7530.0	48B «104 x 62»	Pg 29X2	7848.6342.0						
48B «104 x 62»	Pg 36X2	7848.7531.0	48B «104 x 62»	Pg 36X2	7848.6321.0						
◇: With enlarger Pg36/Pg42 Type: STD for inserts up to 500V S-D, S-DD, S-E, S-ES, S-ESHV, S-EE, S-HSB, S-K, S-M series						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue			Accessories, cable glands and tools see page: 36 ÷ 42		

Surface mounting housings			Surface mounting housings with cover			Bottom entry surface mounting housings			Bottom entry surface mounting housings with cover		
 HC - High construction			 HC - High construction			With IP68 metal cable glands  HC - High construction			With IP68 metal cable glands  HC - High construction		
Size	Thread	Part No.	Size	Thread	Part No.	Size	Thread	Part No.	Size	Thread	Part No.
6B «44 x 27»	M 25x2	7806.7150.0	6B «44 x 27»	M 25x2	7806.7264.0	6B «44 x 27»	M 25	7806.7070.0	6B «44 x 27»	M 25	7806.7078.0
6B «44 x 27»	M 32	7806.7151.0	6B «44 x 27»	M 32	7806.7265.0	6B «44 x 27»	M 32	7806.7071.0	6B «44 x 27»	M 32	7806.7079.0
6B «44 x 27»	M 32X2	7806.7152.0	6B «44 x 27»	M 32X2	7806.7266.0						
6B «44 x 27»	M 40	7806.7153.0	6B «44 x 27»	M 40	7806.7267.0	10B «57 x 27»	M 25	7810.7072.0	10B «57 x 27»	M 25	7810.7080.0
6B «44 x 27»	M 40X2	7806.7154.0	6B «44 x 27»	M 40X2	7806.7268.0	10B «57 x 27»	M 32	7810.7073.0	10B «57 x 27»	M 32	7810.7081.0
6B «44 x 27»	Pg 21	7806.7155.0	6B «44 x 27»	Pg 21	7806.7269.0						
6B «44 x 27»	Pg 21X2	7806.7156.0	6B «44 x 27»	Pg 21X2	7806.7270.0	16B «77 x 27»	M 25	7816.7074.0	16B «77 x 27»	M 25	7816.7082.0
6B «44 x 27»	Pg 29	7806.7157.0	6B «44 x 27»	Pg 29	7806.7271.0	16B «77 x 27»	M 32	7816.7075.0	16B «77 x 27»	M 32	7816.7083.0
6B «44 x 27»	Pg 29X2	7806.7158.0	6B «44 x 27»	Pg 29X2	7806.7272.0						
10B «57 x 27»	M 25x2	7810.7159.0	10B «57 x 27»	M 25x2	7810.7273.0	24B «104 x 27»	M 25	7824.7076.0	24B «104 x 27»	M 25	7824.7084.0
10B «57 x 27»	M 32	7810.7160.0	10B «57 x 27»	M 32	7810.7274.0	24B «104 x 27»	M 32	7824.7077.0	24B «104 x 27»	M 32	7824.7085.0
10B «57 x 27»	M 32X2	7810.7161.0	10B «57 x 27»	M 32X2	7810.7275.0						
10B «57 x 27»	M 40	7810.7162.0	10B «57 x 27»	M 40	7810.7276.0						
10B «57 x 27»	M 40X2	7810.7163.0	10B «57 x 27»	M 40X2	7810.7277.0						
10B «57 x 27»	Pg 21	7810.7164.0	10B «57 x 27»	Pg 21	7810.7278.0						
10B «57 x 27»	Pg 21X2	7810.7165.0	10B «57 x 27»	Pg 21X2	7810.7279.0						
10B «57 x 27»	Pg 29	7810.7166.0	10B «57 x 27»	Pg 29	7810.7280.0						
10B «57 x 27»	Pg 29X2	7810.7167.0	10B «57 x 27»	Pg 29X2	7810.7281.0						
16B «77 x 27»	M 25x2	7816.7168.0	16B «77 x 27»	M 25x2	7816.7282.0						
16B «77 x 27»	M 32	7816.7169.0	16B «77 x 27»	M 32	7816.7283.0						
16B «77 x 27»	M 32X2	7816.7170.0	16B «77 x 27»	M 32X2	7816.7284.0						
16B «77 x 27»	M 40	7816.7171.0	16B «77 x 27»	M 40	7816.7285.0						
16B «77 x 27»	M 40X2	7816.7172.0	16B «77 x 27»	M 40X2	7816.7286.0						
16B «77 x 27»	Pg 21	7816.7173.0	16B «77 x 27»	Pg 21	7816.7287.0						
16B «77 x 27»	Pg 21X2	7816.7174.0	16B «77 x 27»	Pg 21X2	7816.7288.0						
16B «77 x 27»	Pg 29	7816.7175.0	16B «77 x 27»	Pg 29	7816.7289.0						
16B «77 x 27»	Pg 29X2	7816.7176.0	16B «77 x 27»	Pg 29X2	7816.7290.0						
24B «104 x 27»	M 32	7824.7178.0	24B «104 x 27»	M 32	7824.7292.0						
24B «104 x 27»	M 32X2	7824.7179.0	24B «104 x 27»	M 32X2	7824.7293.0						
24B «104 x 27»	M 40	7824.7180.0	24B «104 x 27»	M 40	7824.7294.0						
24B «104 x 27»	M 40X2	7824.7181.0	24B «104 x 27»	M 40X2	7824.7295.0						
24B «104 x 27»	Pg 21	7824.7182.0	24B «104 x 27»	Pg 21	7824.7296.0						
24B «104 x 27»	Pg 21X2	7824.7183.0	24B «104 x 27»	Pg 21X2	7824.7297.0						
24B «104 x 27»	Pg 29	7824.7184.0	24B «104 x 27»	Pg 29	7824.7298.0						
24B «104 x 27»	Pg 29X2	7824.7185.0	24B «104 x 27»	Pg 29X2	7824.7299.0						
Type: STD for inserts up to 500V S-D, S-DD, S-E, S-ES, S-ESHV, S-EE, S-HSB, S-K, S-M series						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue			Accessories, cable glands and tools see page: 36 ÷ 42		

Bulkhead mounting housings			Hoods with 2 pegs for 1 lever			Hoods top entry with 2 pegs for 1 lever			Hoods top entry with 2 pegs for 1 lever		
			Top entry  Side entry 			With threaded fitting  HC - High construction			Without threaded fitting For IP68 cable glands  Without cable entry  HC - High construction		
Size		Part No.	Size	Thread	Part No.	Size	Thread	Part No.	Size	Thread	Part No.
6B «44 x 27»		7806.6401.0	6B «44 x 27»	M 20	Top entry 7806.6553.0	6B «44 x 27»	M 25	7806.6449.0	6B «44 x 27»	M 25	7806.6449.5
10B «57 x 27»		7810.6403.0	6B «44 x 27»	M 25	7806.6554.0	6B «44 x 27»	M 32	7806.6450.0	6B «44 x 27»	M 32	7806.6450.5
16B «77 x 27»		7816.6405.0	6B «44 x 27»	M 25	7806.6554.0	6B «44 x 27»	Pg 21	7806.6427.0	6B «44 x 27»	Pg 21	7806.6427.5
24B «104 x 27»		7824.6407.0	6B «44 x 27»	Pg 13.5	7806.6503.0	6B «44 x 27»	Pg 29	7806.6428.0	6B «44 x 27»	Pg 29	7806.6428.5
32B «77 x 62»		7832.6409.0	6B «44 x 27»	Pg 16	7806.6504.0	10B «57 x 27»	M 32	7810.6451.0	10B «57 x 27»	M 32	7810.6451.5
48B «104x62»		7848.7440.0	10B «57 x 27»	M 20	7810.6556.0	10B «57 x 27»	M 40	7810.6452.0	10B «57 x 27»	M 40	7810.6452.5
			10B «57 x 27»	M 25	7810.6593.0	10B «57 x 27»	Pg 21	7810.6429.0	10B «57 x 27»	Pg 21	7810.6429.5
			10B «57 x 27»	Pg 16	7810.6506.0	10B «57 x 27»	Pg 29	7810.6430.0	10B «57 x 27»	Pg 29	7810.6430.5
			16B «77 x 27»	M 25	7816.6558.0	16B «77 x 27»	M 32	7816.6453.0	16B «77 x 27»	M 32	7816.6453.5
6B «44 x 27»		7806.6402.0	16B «77 x 27»	M 32	7816.6547.0	16B «77 x 27»	M 40	7816.6454.0	16B «77 x 27»	M 40	7816.6454.5
10B «57 x 27»		7810.6404.0	16B «77 x 27»	Pg 21	7816.6508.0	16B «77 x 27»	Pg 21	7816.6431.0	16B «77 x 27»	Pg 21	7816.6431.5
16B «77 x 27»		7816.6406.0	16B «77 x 27»	Pg 29	7816.6548.0	16B «77 x 27»	Pg 29	7816.6432.0	16B «77 x 27»	Pg 29	7816.6432.5
24B «104 x 27»		7824.6408.0	24B «104 x 27»	M 25	7824.6560.0	24B «104 x 27»	M 32	7824.6455.0	24B «104 x 27»	M 32	7824.6455.5
32B «77 x 62»		7832.6410.0	24B «104 x 27»	M 32	7824.6924.0	24B «104 x 27»	M 40	7824.6456.0	24B «104 x 27»	M 40	7824.6456.5
48B «104x62»		7848.6411.0	24B «104 x 27»	Pg 21	7824.6510.0	24B «104 x 27»	Pg 21	7824.6433.0	24B «104 x 27»	Pg 21	7824.6433.5
			24B «104 x 27»	Pg 29	7824.6613.0	24B «104 x 27»	Pg 29	7824.6434.0	24B «104 x 27»	Pg 29	7824.6434.5
					Side entry	32B «77 x 62»	M 32	7832.7135.0	32B «77 x 62»	M 32	7832.7135.5
			6B «44 x 27»	M 20	7806.6551.0	32B «77 x 62»	M 40	7832.6562.0	32B «77 x 62»	M 40	7832.6562.5
			6B «44 x 27»	M 25	7806.6552.0	32B «77 x 62»	Pg 29	7832.7134.0	32B «77 x 62»	Pg 29	7832.7134.5
			6B «44 x 27»	Pg 13.5	7806.6501.0	32B «77 x 62»	Pg 36	7832.6512.0	32B «77 x 62»	Pg 36	7832.6512.5
			6B «44 x 27»	Pg 16	7806.6502.0	48B «104 x 62»	M 32	7848.6566.0	48B «104 x 62»	M 32	7848.6566.5
			10B «57 x 27»	M 20	7810.6555.0	48B «104 x 62»	M 40	7848.6567.0	48B «104 x 62»	M 40	7848.6567.5
			10B «57 x 27»	M 25	7810.6594.0	48B «104 x 62»	M 50	7848.6568.0	48B «104 x 62»	M 50	7848.6568.5
			10B «57 x 27»	Pg 16	7810.6505.0	48B «104 x 62»	Pg 29	7848.6516.0	48B «104 x 62»	Pg 29	7848.6516.5
			16B «77 x 27»	M 25	7816.6557.0	48B «104 x 62»	Pg 36	7848.6517.0	48B «104 x 62»	Pg 36	7848.6517.5
			16B «77 x 27»	M 32	7816.6549.0	48B «104 x 62»	Pg 42	7848.6518.0	48B «104 x 62»	Pg 42	7848.6518.5
			16B «77 x 27»	Pg 21	7816.6507.0						
			16B «77 x 27»	Pg 29	7816.6550.0						
			24B «104 x 27»	M 25	7824.6559.0				6B «44 x 27»		7806.6941.0
			24B «104 x 27»	M 32	7824.6925.0				10B «57 x 27»		7810.7007.0
			24B «104 x 27»	Pg 21	7824.6509.0				16B «77 x 27»		7816.7019.0
			24B «104 x 27»	Pg 29	7824.6614.0				24B «104 x 27»		7824.7043.0
									32B «77 x 62»		7832.7148.0
									48B «104x62»		7848.7149.0
Type: STD for inserts up to 500V S-D, S-DD, S-E, S-ES, S-ESHV, S-EE, S-HSB, S-K, S-M series						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue			Accessories, cable glands and tools see page: 36 ÷ 42		

Hoods side entry with 2 pegs for 1 lever			Hoods side entry with 2 pegs for 1 lever			Hoods top entry with 1 lever and gasket			Hoods top entry with 1 lever and gasket		
With threaded fitting  HC - High construction			Without threaded fitting For IP68 cable glands  HC - High construction						With threaded fitting  Without threaded fitting For IP68 cable glands  HC - High construction		
Size	Thread	Part No.	Size	Thread	Part No.	Size	Thread	Part No.	Size	Thread	Part No.
6B «44 x 27»	M 25	7806.6491.0	6B «44 x 27»	M 25	7806.6491.5	6B «44 x 27»	M 20	7806.6592.0	10B «57 x 27» 10B «57 x 27» 10B «57 x 27» 10B «57 x 27»	M 25 M 32 Pg 21 Pg 29	With threaded fitting 7810.7008.0 7810.7009.0 7810.7107.0 7810.7108.0
6B «44 x 27»	M 32	7806.6492.0	6B «44 x 27»	M 32	7806.6492.5	6B «44 x 27»	M 25	7806.6581.0			
6B «44 x 27»	Pg 21	7806.6477.0	6B «44 x 27»	Pg 21	7806.6477.5	6B «44 x 27»	Pg 13,5	7806.6542.0			
6B «44 x 27»	Pg 29	7806.6478.0	6B «44 x 27»	Pg 29	7806.6478.5	6B «44 x 27»	Pg 16	7806.6531.0			
10B «57 x 27»	M 32	7810.6493.0	10B «57 x 27»	M 32	7810.6493.5	10B «57 x 27»	M 25	7810.6582.0	16B «77 x 27»	M 25	7816.6461.0
10B «57 x 27»	M 40	7810.6494.0	10B «57 x 27»	M 40	7810.6494.5	10B «57 x 27»	Pg 16	7810.6532.0	16B «77 x 27»	M 32	7816.6462.0
10B «57 x 27»	Pg 21	7810.6479.0	10B «57 x 27»	Pg 21	7810.6479.5	16B «77 x 27»	M 25	7816.6583.0	16B «77 x 27»	Pg 21	7816.6439.0
10B «57 x 27»	Pg 29	7810.6480.0	10B «57 x 27»	Pg 29	7810.6480.5	16B «77 x 27»	Pg 21	7816.6533.0	16B «77 x 27»	Pg 29	7816.6440.0
16B «77 x 27»	M 32	7816.6495.0	16B «77 x 27»	M 32	7816.6495.5	24B «104 x 27» 24B «104 x 27» 24B «104 x 27» 24B «104 x 27»	M 32	7824.6584.0	24B «104 x 27»	M 25	7824.6463.0
16B «77 x 27»	M 40	7816.6496.0	16B «77 x 27»	M 40	7816.6496.5		Pg 21	7824.6534.0	24B «104 x 27»	M 32	7824.6464.0
16B «77 x 27»	Pg 21	7816.6481.0	16B «77 x 27»	Pg 21	7816.6481.5		Pg 29	7824.7147.0	24B «104 x 27»	Pg 21	7824.6441.0
16B «77 x 27»	Pg 29	7816.6482.0	16B «77 x 27»	Pg 29	7816.6482.5				24B «104 x 27»	Pg 29	7824.6442.0
24B «104 x 27»	M 32	7824.6497.0	24B «104 x 27»	M 32	7824.6497.5	32B «77 x 62» 32B «77 x 62» 32B «77 x 62» 32B «77 x 62» 32B «77 x 62» 32B «77 x 62» 32B «77 x 62» 32B «77 x 62» 32B «77 x 62» 32B «77 x 62» 32B «77 x 62» 32B «77 x 62» 32B «77 x 62» 32B «77 x 62» 32B «77 x 62» 32B «77 x 62»			32B «77 x 62»	M 40	7832.6585.0
24B «104 x 27»	M 40	7824.6498.0	24B «104 x 27»	M 40	7824.6498.5				32B «77 x 62»	Pg 36	7832.6535.0
24B «104 x 27»	Pg 21	7824.6483.0	24B «104 x 27»	Pg 21	7824.6483.5				Without threaded fitting 10B «57 x 27» 10B «57 x 27» 10B «57 x 27» 10B «57 x 27»	M 25 M 32 Pg 21 Pg 29	7810.7008.5 7810.7009.5 7810.7107.5 7810.7108.5
24B «104 x 27»	Pg 29	7824.6484.0	24B «104 x 27»	Pg 29	7824.6484.5						
32B «77 x 62»	M 32	7832.7137.0	32B «77 x 62»	M 32	7832.7137.5						
32B «77 x 62»	M 40	7832.6561.0	32B «77 x 62»	M 40	7832.6561.5						
32B «77 x 62»	Pg 21	7832.7139.0	32B «77 x 62»	Pg 21	7832.7139.5				16B «77 x 27»	M 25	7816.6461.5
32B «77 x 62»	Pg 29	7832.7136.0	32B «77 x 62»	Pg 29	7832.7136.5				16B «77 x 27»	M 32	7816.6462.5
32B «77 x 62»	Pg 36	7832.6511.0	32B «77 x 62»	Pg 36	7832.6511.5				16B «77 x 27»	Pg 21	7816.6439.5
48B «104 x 62»	M 32	7848.6563.0	48B «104 x 62»	M 32	7848.6563.5				16B «77 x 27»	Pg 29	7816.6440.5
48B «104 x 62»	M 40	7848.6564.0	48B «104 x 62»	M 40	7848.6564.5				24B «104 x 27»	M 25	7824.6463.5
48B «104 x 62»	M 50	7848.6565.0	48B «104 x 62»	M 50	7848.6565.5				24B «104 x 27»	M 32	7824.6464.5
48B «104 x 62»	Pg 29	7848.6513.0	48B «104 x 62»	Pg 29	7848.6513.5				24B «104 x 27»	Pg 21	7824.6441.5
48B «104 x 62»	Pg 36	7848.6514.0	48B «104 x 62»	Pg 36	7848.6514.5				24B «104 x 27»	Pg 29	7824.6442.5
48B «104 x 62»	Pg 42	7848.6515.0	48B «104 x 62»	Pg 42	7848.6515.5				32B «77 x 62»	M 40	7832.6585.5
									32B «77 x 62»	Pg 36	7832.6535.5
Type: STD for inserts up to 500V S-D, S-DD, S-E, S-ES, S-ESHV, S-EE, S-HSB, S-K, S-M series						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue			Accessories, cable glands and tools see page: 36 ÷ 42		

Covers with 2 pegs and with 1 lever and gasket			6B«44x27» reversed locking system surface mounting housings			6B«44x27» reversed locking system bulkhead mounting housings			6B«44x27» reversed locking system top and side entry with 1 lever			
												
Size		Part No.	Size	Thread	Part No.	Size		Part No.	Size	Thread	Part No.	
6B «44 x 27» 10B «57 x 27» 16B «77 x 27» 24B «104 x 27» 32B «77 x 62» 6B «44 x 27» 10B «57 x 27» 16B «77 x 27» 24B «104 x 27» 32B «77 x 62»		With 2 pegs	6B «44 x 27»	M 20	7806.6391.0	6B «44 x 27»		7806.6396.0	6B «44 x 27»	M 20	7806.7001.0	
		7806.6813.0	6B «44 x 27»	M 20x2	7806.6392.0				6B «44 x 27»	M 25	7806.7002.0	
		7810.6814.0	6B «44 x 27»	Pg 16	7806.6343.0				6B «44 x 27»	Pg 13,5	7806.7101.0	
		7816.6815.0	6B «44 x 27»	Pg 16x2	7806.6344.0	6B «44 x 27»		With cover	6B «44 x 27»	Pg 16	7806.7102.0	
		7824.6816.0										
		7832.6817.0										
		With one lever and gasket										
		7806.6818.0				6B «44x27» reversed locking cover with 2 pegs and gasket			6B «44 x 27»	M 20	7806.7450.0	
		7810.6819.0							6B «44 x 27»	M 25	7806.7451.0	
		7816.6820.0							6B «44 x 27»	Pg 13,5	7806.7550.0	
7824.6821.0							6B «44 x 27»	Pg 16	7806.7551.0			
7832.6822.0												

Surface mounting housings			Bulkhead mounting housings			Hoods top entry			Hoods side entry		
 											

Hood thermoplastic material STD type, black color			Hood metal type			Bulkhead mounting housing and cover, black color			Bulkhead mounting housing for interfaces		
Top entry  Side entry  With cable glands			Top entry  Without threaded fitting for IP68 cable gland Side entry  HC - High construction			Thermoplastic type  Metal type  Thermoplastic cover 			With one lever and cover  With two levers and cover 		
Size	Cable Dia	Part No.	Type	Thread	Part No.	Size	Type	Part No.	Size	Type	Part No.
«32x13»	8 - 14	Top entry 7808.6646.0	STD	M 20	Top entry 7808.6654.5	«32x13»	STD	Thermoplastic type 7808.6660.0	32A«66x40»	STD Grey RAL 7037	With one lever 7832.4700.0
«32x13»	13 - 18	7808.6648.0	STD	M 25	7808.6655.5				32A«66x40»	STD Grey RAL 7037	7832.4710.0
			STD	M 32	7808.6656.5					STD Grey RAL 7035	
		Side entry	HE	M 20	7808.6654.6			Metal type			
«32x13»	8 - 14	7808.6640.0	HE	M 25	7808.6655.6	«32x13»	STD	7808.6662.0	32A«66x40»	HE	7832.4700.1
«32x13»	13 - 18	7808.6643.0	HE	M 32	7808.6656.6	«32x13»	HE	7808.6662.1	32A«66x40»	EMC	7832.4700.4
		Top entry with lever			Side entry				32A«66x40»		With 2 levers
«32x13»	8 - 14	7808.6667.0	STD	M 20	7808.6650.5	«32x13»	STD thermo-plastic	Cover with gasket for female insert 7808.6665.0	32A«66x40»	STD Grey RAL 7037	7832.4705.0
«32x13»	13 - 18	7808.6668.0	STD	M 25	7808.6651.5						
			STD	M 32	7808.6652.5						
			HE	M 20	7808.6650.6				32A«66x40»	STD Grey RAL 7035	7832.4715.0
			HE	M 25	7808.6651.6				32A«66x40»	HE	7832.4705.1
			HE	M 32	7808.6652.6	«32x13»	STD thermo-plastic	Cover without gasket for male insert 7808.6666.0	32A«66x40»	EMC	7832.4705.4
					Metal cable glands to be ordered separately. Please refer to page 36						
Type: STD, HE for inserts up to 500V/690V for S-QD inserts For interfaces size 32A «66x40»						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue			Accessories, cable glands and tools see page: 36 ÷ 42		

Surface mounting housings			Surface mounting housings			Bottom entry surface mounting housings			Bulkhead mounting housings		
			 HC - High construction			With IP68 cable gland   HC - High construction					
Size	Thread	Part No.	Size	Thread	Part No.	Size	Thread	Part No.	Size		Part No.
10B «57x27»	M 20	7810.6372.0	10B «57x27»	M 25	7810.7458.0	10B «57x27»	M 20	7810.7562.0	10B «57x27»		7810.6412.0
10B «57x27»	M 20X2	7810.6373.0	10B «57x27»	M 25x2	7810.7459.0	10B «57x27»	M 25	7810.7563.0	16B «77x27»		7816.6413.0
10B «57x27»	Pg 16	7810.6322.0	10B «57x27»	M 32	7810.7460.0	16B «77x27»	M 20	7816.7564.0	24B «104x27»		7824.6414.0
10B «57x27»	Pg 16X2	7810.6323.0	10B «57x27»	M 32X2	7810.7461.0	16B «77x27»	M 25	7816.7565.0	32B «77x62»		7832.6415.0
16B «77x27»	M 25	7816.6374.0	10B «57x27»	M 40	7810.7462.0	24B «104x27»	M 20	7824.7566.0			
16B «77x27»	M 25X2	7816.6375.0	10B «57x27»	M 40X2	7810.7463.0	24B «104x27»	M 25	7824.7567.0			
16B «77x27»	Pg 21	7816.6324.0	10B «57x27»	Pg 21	7810.7464.0	32B «77x62»	M 32	7832.7568.0			
16B «77x27»	Pg 21X2	7816.6325.0	10B «57x27»	Pg 21X2	7810.7465.0	32B «77x62»	M 40	7832.7569.0			
24B «104x27»	M 25	7824.6376.0	10B «57x27»	Pg 29	7810.7466.0	32B «77x62»	M 50	7832.7570.0			
24B «104x27»	M 25X2	7824.6377.0	10B «57x27»	Pg 29X2	7810.7467.0						
24B «104x27»	Pg 21	7824.6326.0	16B «77x27»	M 25x2	7816.7468.0						
24B «104x27»	Pg 21X2	7824.6327.0	16B «77x27»	M 32	7816.7469.0						
			16B «77x27»	M 32X2	7816.7470.0						
32B «77x62»	M 40	7832.6384.0	16B «77x27»	M 40	7816.7471.0	10B «57x27»	M 25	7810.7573.0			
32B «77x62»	M 40X2	7832.6385.0	16B «77x27»	M 40X2	7816.7472.0	10B «57x27»	M 32	7810.7574.0			
32B «77x62»	M 50	7832.6378.0	16B «77x27»	Pg 21	7816.7473.0	16B «77x27»	M 25	7816.7575.0			
32B «77x62»	M 50X2	7832.6379.0	16B «77x27»	Pg 21X2	7816.7474.0	16B «77x27»	M 32	7816.7576.0			
32B «77x62»	Pg 29	7832.6338.0	16B «77x27»	Pg 29	7816.7475.0	24B «104x27»	M 25	7824.7577.0			
32B «77x62»	Pg 29X2	7832.6339.0	16B «77x27»	Pg 29X2	7816.7476.0	24B «104x27»	M 32	7824.7578.0			
32B «77x62»	Pg 36	7832.6328.0	24B «104x27»	M 32	7824.7478.0						
32B «77x62»	Pg 36X2	7832.6329.0	24B «104x27»	M 32X2	7824.7479.0						
32B «77x62»	Pg 42	7832.6340.0	24B «104x27»	M 40	7824.7480.0						
32B «77x62»	Pg 42X2	7832.6341.0	24B «104x27»	M 40X2	7824.7481.0						
			24B «104x27»	Pg 21	7824.7482.0						
			24B «104x27»	Pg 21X2	7824.7483.0						
			24B «104x27»	Pg 29	7824.7484.0						
			24B «104x27»	Pg 29X2	7824.7485.0						
Type: STD for inserts up to 500V S-D, S-DD, S-E, S-ES, S-ESHV, S-EE, S-HSB, S-K, S-M series						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue			Accessories, cable glands and tools see page: 36 ÷ 42		



Hoods with 4 pegs for 2 levers			Hoods top entry with 4 pegs for 2 levers			Hoods side entry with 4 pegs for 2 levers			Hoods frontal entry with 4 pegs for 2 levers		
 			With threaded fitting  Without threaded fitting for IP68 cable gland  HC - High construction			With threaded fitting  Without threaded fitting for IP68 cable gland  HC - High construction			Frontal entry  Without cable entry  HC - High construction		
Size	Thread	Part No.	Size	Thread	Part No.	Size	Thread	Part No.	Size	Thread	Part No.
Top entry			With threaded fitting			With threaded fitting			Frontal entry		
10B «57 x 27»	M 20	7810.6570.0	10B «57 x 27»	M 32	7810.6443.0	10B «57 x 27»	M 32	7810.6485.0	10B «57 x 27»	M 20	7810.7011.0
10B «57 x 27»	M 25	7810.6595.0	10B «57 x 27»	M 40	7810.6444.0	10B «57 x 27»	M 40	7810.6486.0	10B «57 x 27»	Pg 16	7810.7109.0
10B «57 x 27»	Pg 16	7810.6520.0	10B «57 x 27»	Pg 21	7810.6421.0	10B «57 x 27»	Pg 21	7810.6471.0	10B «57 x 27»	Pg 16	7810.7109.0
			10B «57 x 27»	Pg 29	7810.6422.0	10B «57 x 27»	Pg 29	7810.6472.0			
16B «77 x 27»	M 25	7816.6572.0	16B «77 x 27»	M 32	7816.6445.0	16B «77 x 27»	M 32	7816.6487.0	16B «77 x 27»	M 25	7816.7021.0
16B «77 x 27»	M 32	7816.6921.0	16B «77 x 27»	M 40	7816.6446.0	16B «77 x 27»	M 40	7816.6488.0	16B «77 x 27»	Pg 21	7816.7113.0
16B «77 x 27»	Pg 21	7816.6522.0	16B «77 x 27»	Pg 21	7816.6423.0	16B «77 x 27»	Pg 21	7816.6473.0	16B «77 x 27»	Pg 21	7816.7113.0
16B «77 x 27»	Pg 29	7816.6546.0	16B «77 x 27»	Pg 29	7816.6424.0	16B «77 x 27»	Pg 29	7816.6474.0			
24B «104 x 27»	M 25	7824.6574.0	24B «104 x 27»	M 32	7824.6447.0	24B «104 x 27»	M 32	7824.6489.0	24B «104 x 27»	M 25	7824.7032.0
24B «104 x 27»	M 32	7824.6926.0	24B «104 x 27»	M 40	7824.6448.0	24B «104 x 27»	M 40	7824.6490.0	24B «104 x 27»	M 32	7824.7033.0
24B «104 x 27»	Pg 21	7824.6524.0	24B «104 x 27»	Pg 21	7824.6425.0	24B «104 x 27»	Pg 21	7824.6475.0	24B «104 x 27»	Pg 21	7824.7120.0
24B «104 x 27»	Pg 29	7824.6543.0	24B «104 x 27»	Pg 29	7824.6426.0	24B «104 x 27»	Pg 29	7824.6476.0	24B «104 x 27»	Pg 29	7824.7121.0
			32B «77 x 62»	M 32	7832.6578.0	32B «77 x 62»	M 32	7832.6575.0			
			32B «77 x 62»	M 40	7832.6579.0	32B «77 x 62»	M 40	7832.6576.0			
			32B «77 x 62»	M 50	7832.6580.0	32B «77 x 62»	M 50	7832.6577.0			
			32B «77 x 62»	Pg 29	7832.6528.0	32B «77 x 62»	Pg 21	7832.7142.0			
			32B «77 x 62»	Pg 36	7832.6529.0	32B «77 x 62»	Pg 29	7832.6525.0			
			32B «77 x 62»	Pg 42	7832.6530.0	32B «77 x 62»	Pg 36	7832.6526.0			
						32B «77 x 62»	Pg 42	7832.6527.0			
Side entry			Without threaded fitting			Without threaded fitting			Without cable entry		
10B «57 x 27»	M 20	7810.6569.0	10B «57 x 27»	M 32	7810.6443.5	10B «57 x 27»	M 32	7810.6485.5	10B «57 x 27»		7810.7012.0
10B «57 x 27»	M 25	7810.6596.0	10B «57 x 27»	M 40	7810.6444.5	10B «57 x 27»	M 40	7810.6486.5	16B «77 x 27»		7816.7022.0
10B «57 x 27»	Pg 16	7810.6519.0	10B «57 x 27»	Pg 21	7810.6421.5	10B «57 x 27»	Pg 21	7810.6471.5	24B «104 x 27»		7824.7034.0
			10B «57 x 27»	Pg 29	7810.6422.5	10B «57 x 27»	Pg 29	7810.6472.5	32B «77 x 62»		7832.7048.0
16B «77 x 27»	M 25	7816.6571.0	16B «77 x 27»	M 32	7816.6445.5	16B «77 x 27»	M 32	7816.6487.5			
16B «77 x 27»	M 32	7816.6922.0	16B «77 x 27»	M 40	7816.6446.5	16B «77 x 27»	M 40	7816.6488.5			
16B «77 x 27»	Pg 21	7816.6521.0	16B «77 x 27»	Pg 21	7816.6423.5	16B «77 x 27»	Pg 21	7816.6473.5			
16B «77 x 27»	Pg 29	7816.6545.0	16B «77 x 27»	Pg 29	7816.6424.5	16B «77 x 27»	Pg 29	7816.6474.5			
24B «104 x 27»	M 25	7824.6573.0	24B «104 x 27»	M 32	7824.6447.5	24B «104 x 27»	M 32	7824.6489.5			
24B «104 x 27»	M 32	7824.6927.0	24B «104 x 27»	M 40	7824.6448.5	24B «104 x 27»	M 40	7824.6490.5			
24B «104 x 27»	Pg 21	7824.6523.0	24B «104 x 27»	Pg 21	7824.6425.5	24B «104 x 27»	Pg 21	7824.6475.5			
24B «104 x 27»	Pg 29	7824.6544.0	24B «104 x 27»	Pg 29	7824.6426.5	24B «104 x 27»	Pg 29	7824.6476.5			
			32B «77 x 62»	M 32	7832.6578.5	32B «77 x 62»	M 32	7832.6575.5			
			32B «77 x 62»	M 40	7832.6579.5	32B «77 x 62»	M 40	7832.6576.5			
			32B «77 x 62»	M 50	7832.6580.5	32B «77 x 62»	M 50	7832.6577.5			
			32B «77 x 62»	Pg 29	7832.6528.5	32B «77 x 62»	Pg 21	7832.7142.5			
			32B «77 x 62»	Pg 36	7832.6529.5	32B «77 x 62»	Pg 29	7832.6525.5			
			32B «77 x 62»	Pg 42	7832.6530.5	32B «77 x 62»	Pg 36	7832.6526.5			
						32B «77 x 62»	Pg 42	7832.6527.5			
Type: STD for inserts up to 500V S-D, S-DD, S-E, S-ES, S-ESHV, S-EE, S-HSB, S-K, S-M series						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue			Accessories, cable glands and tools see page: 36 ÷ 42		

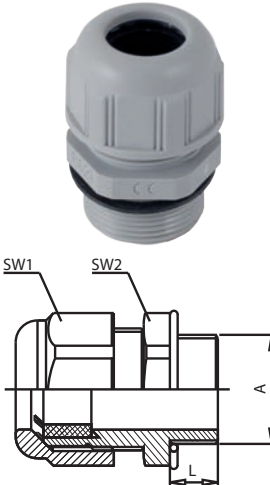
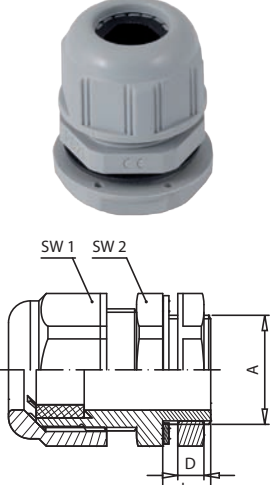
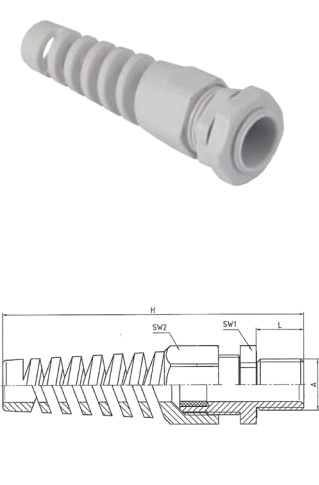
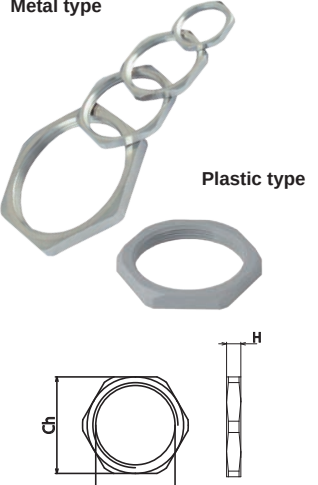
Hoods for ribbon cable with strain relief IP66			Hoods with double entries 4 pegs for 2 levers			Hoods top entry with 2 levers and gasket			Hoods top entry with 2 levers and gasket		
 HC - High construction			Top entry  With threaded fitting Without threaded fitting for IP68 cable gland Frontal entry  HC - High construction			With threaded fitting  Without threaded fitting for IP68 cable gland  HC - High construction					
Size	Cable size HxL	Part No.	Size	Thread	Part No.	Size	Thread	Part No.	Size	Thread	Part No.
10B «57 x 27»	3,8-5,1 X 18-22	7810.5361.0	10B «57x27» 10B «57x27» 16B «77x27» 16B «77x27» 16B «77x27» 16B «77x27» 24B «104x27» 24B «104x27» 24B «104x27» 24B «104x27»	M 20x2 Pg13,5x2 M 20x2 M 25x2 Pg 16x2 Pg 21x2 M 32x2 M 40x2 Pg 21x2 Pg 29x2	Top entry	10B «57 x 27»	M 25 M 32 Pg 21 Pg 29 M 25 M 32 Pg 21 Pg 29 M 25 M 32 Pg 21 Pg 29 M 25 M 32 Pg 21 Pg 29 M 32 M 40 M 50 Pg 29 Pg 36 Pg 42	With threaded fitting	10B «57 x 27»	M 20	7810.6598.0
10B «57 x 27»	3,8-5,1 X 27-32	7810.5362.0			With threaded fitting	10B «57 x 27»		M 25	7810.6586.0		
16B «77 x 27»	3,8-5,1 X 18-22	7816.5365.0			Without threaded fitting	10B «57 x 27»		Pg 16	7810.6536.0		
16B «77 x 27»	3,8-5,1 X 27-32	7816.5366.0			Without threaded fitting	16B «77 x 27»		M 25	7816.6587.0		
16B «77 x 27»	3,8-5,1 X 42-46	7816.5367.0			Without threaded fitting	16B «77 x 27»		M 32	7816.6923.0		
16B «77 x 27»	3,8-5,1 X 48-53	7816.5368.0			Without threaded fitting	16B «77 x 27»		Pg 21	7816.6537.0		
24B «104 x 27»	3,8-5,1 X 18-22	7824.5370.0			Without threaded fitting	24B «104 x 27»		M 32	7824.6588.0		
24B «104 x 27»	3,8-5,1 X 27-32	7824.5371.0			Without threaded fitting	24B «104 x 27»		Pg 21	7824.6538.0		
24B «104 x 27»	3,8-5,1 X 42-46	7824.5372.0			Without threaded fitting	24B «104 x 27»		Pg 29	7824.7146.0		
24B «104 x 27»	3,8-5,1 X 48-53	7824.5373.0			Without threaded fitting	24B «104 x 27»		Covers with 4 pegs Covers with 2 levers			
24B «104 x 27»	3,8-5,1 X 62-66	7824.5374.0			Without threaded fitting	24B «104 x 27»					
24B «104 x 27»	4,5-5,7 X 72-76	7824.5375.0			Without threaded fitting	24B «104 x 27»					
Type: STD for inserts up to 500V S-D, S-DD, S-E, S-ES, S-ESHV, S-EE, S-HSB, S-K, S-M series						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue					
									Accessories, cable glands and tools see page: 36 ÷ 42		

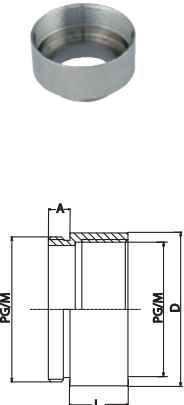
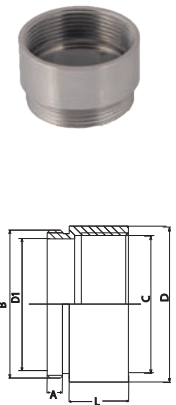
Surface mounting housings			Surface mounting housings with cover			Bottom entry surface mounting housings			Surface mounting housings		
						 With cover 					
Size	Thread	Part No.	Size	Thread	Part No.	Size	Thread	Part No.	Size	Typo	Part No.
10B «57 x 27»	M 20	7810.5001.0	10B «57 x 27»	M 20	7810.5023.0			Without cover	10B «57 x 27»	M 25X2	7810.5129.0
10B «57 x 27»	M 20X2	7810.5002.0	10B «57 x 27»	M 20X2	7810.5024.0	10B «57 x 27»	M 20	7810.7581.0	10B «57 x 27»	M 32	7810.5130.0
10B «57 x 27»	Pg 16	7810.5003.0	10B «57 x 27»	Pg 16	7810.5025.0	10B «57 x 27»	M 25	7810.7582.0	10B «57 x 27»	M 32X2	7810.5131.0
10B «57 x 27»	Pg 16X2	7810.5004.0	10B «57 x 27»	Pg 16X2	7810.5026.0	16B «77 x 27»	M 20	7816.7583.0	10B «57 x 27»	M 40	7810.5132.0
16B «77 x 27»	M 25	7816.5005.0	16B «77 x 27»	M 25	7816.5027.0	16B «77 x 27»	M 25	7816.7584.0	10B «57 x 27»	M 40X2	7810.5133.0
16B «77 x 27»	M 25X2	7816.5006.0	16B «77 x 27»	M 25X2	7816.5028.0	24B «104 x 27»	M 20	7824.7585.0	10B «57 x 27»	Pg 21	7810.5134.0
16B «77 x 27»	Pg 21	7816.5007.0	16B «77 x 27»	Pg 21	7816.5029.0	24B «104 x 27»	M 25	7824.7586.0	10B «57 x 27»	Pg 21X2	7810.5135.0
16B «77 x 27»	Pg 21X2	7816.5008.0	16B «77 x 27»	Pg 21X2	7816.5030.0	32B «77 x 62»	M 32	7832.7587.0	10B «57 x 27»	Pg 29	7810.5136.0
24B «104 x 27»	M 25	7824.5009.0	24B «104 x 27»	M 25	7824.5031.0	32B «77 x 62»	M 40	7832.7588.0	10B «57 x 27»	Pg 29X2	7810.5137.0
24B «104 x 27»	M 25X2	7824.5010.0	24B «104 x 27»	M 25X2	7824.5032.0	16B «77 x 27»	M 32	7816.7590.0	16B «77 x 27»	M 32	7816.5138.0
24B «104 x 27»	Pg 21	7824.5011.0	24B «104 x 27»	Pg 21	7824.5033.0	16B «77 x 27»	M 40	7816.7591.0	16B «77 x 27»	M 32X2	7816.5139.0
24B «104 x 27»	Pg 21X2	7824.5012.0	24B «104 x 27»	Pg 21X2	7824.5034.0	16B «77 x 27»	M 50	7816.7592.0	16B «77 x 27»	M 40	7816.5140.0
32B «77 x 62»	M 40	7832.5013.0	32B «77 x 62»	M 40	7832.5035.0	16B «77 x 27»	M 20	7816.7593.0	16B «77 x 27»	M 40X2	7816.5141.0
32B «77 x 62»	M 40X2	7832.5014.0	32B «77 x 62»	M 40X2	7832.5036.0	16B «77 x 27»	M 25	7816.7594.0	16B «77 x 27»	Pg 21	7816.5142.0
32B «77 x 62»	M 50	7832.5015.0	32B «77 x 62»	M 50	7832.5037.0	16B «77 x 27»	M 20	7816.7595.0	16B «77 x 27»	Pg 21X2	7816.5143.0
32B «77 x 62»	M 50X2	7832.5016.0	32B «77 x 62»	M 50X2	7832.5038.0	16B «77 x 27»	M 25	7816.7596.0	16B «77 x 27»	Pg 29	7816.5144.0
32B «77 x 62»	Pg 29	7832.5017.0	32B «77 x 62»	Pg 29	7832.5039.0	24B «104 x 27»	M 20	7824.7597.0	16B «77 x 27»	Pg 29X2	7816.5145.0
32B «77 x 62»	Pg 29X2	7832.5018.0	32B «77 x 62»	Pg 29X2	7832.5040.0	24B «104 x 27»	M 25	7824.7598.0	24B «104 x 27»	M 32	7824.5147.0
32B «77 x 62»	Pg 36	7832.5019.0	32B «77 x 62»	Pg 36	7832.5041.0	24B «104 x 27»	M 32	7832.7599.0	24B «104 x 27»	M 32X2	7824.5148.0
32B «77 x 62»	Pg 36X2	7832.5020.0	32B «77 x 62»	Pg 36X2	7832.5042.0	32B «77 x 62»	M 40	7832.7599.0	24B «104 x 27»	M 40	7824.5149.0
32B «77 x 62»	Pg 42◇	7832.5021.0	32B «77 x 62»	Pg 42 ◇	7832.5043.0	32B «77 x 62»	M 50	7832.6596.0	24B «104 x 27»	M 40X2	7824.5150.0
32B «77 x 62»	Pg 42X2◇	7832.5022.0	32B «77 x 62»	Pg 42X2 ◇	7832.5044.0				24B «104 x 27»	Pg 21	7824.5151.0
									24B «104 x 27»	Pg 21X2	7824.5152.0
									24B «104 x 27»	Pg 29	7824.5153.0
									24B «104 x 27»	Pg 29X2	7824.5154.0
◇: With enlarger Pg36/Pg42 Type: STD for inserts up to 500V S-D, S-DD, S-E, S-ES, S-ESHV, S-EE, S-HSB, S-K, S-M series						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue			Accessories, cable glands and tools see page: 36 ÷ 42		




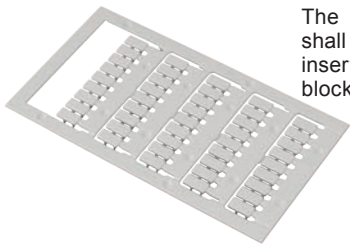

Surface mounting housings with cover			Bottom entry surface mounting housings			Bulkhead mounting housings			Hoods top entry with 2 levers without gasket		
 HC - High construction			 With cover HC - High construction			 With cover					
Size	Thread	Part No.	Size	Thread	Part No.	Size		Part No.	Size	Thread	Part No.
10B «57 x 27»	M 25X2	7810.5159.0			Without cover	10B «57 x 27»		Without cover	10B «57 x 27»	M 20	7810.5060.0
10B «57 x 27»	M 32	7810.5160.0	10B «57 x 27»	M 25	7810.7682.0	16B «77 x 27»		7810.5050.0	10B «57 x 27»	M 25	7810.5061.0
10B «57 x 27»	M 32X2	7810.5161.0	10B «57 x 27»	M 32	7810.7683.0	24B «104 x 27»		7816.5051.0	10B «57 x 27»	Pg 16	7810.5062.0
10B «57 x 27»	M 40	7810.5162.0	16B «77 x 27»	M 25	7816.7684.0	32B «77 x 62»		7824.5052.0	16B «77 x 27»	M 25	7816.5063.0
10B «57 x 27»	M 40X2	7810.5163.0	16B «77 x 27»	M 32	7816.7685.0			7832.5053.0	16B «77 x 27»	M 32	7816.5064.0
10B «57 x 27»	Pg 21	7810.5164.0	24B «104 x 27»	M 25	7824.7686.0			With cover	16B «77 x 27»	Pg 21	7816.5065.0
10B «57 x 27»	Pg 21X2	7810.5165.0	24B «104 x 27»	M 32	7824.7887.0	10B «57 x 27»		7810.5054.0	24B «104 x 27»	M 25	7824.5066.0
10B «57 x 27»	Pg 29	7810.5166.0			With cover	16B «77 x 27»		7816.5055.0	24B «104 x 27»	M 32	7824.5067.0
10B «57 x 27»	Pg 29X2	7810.5167.0	10B «57 x 27»	M 25	7810.7692.0	24B «104 x 27»		7824.5056.0	24B «104 x 27»	Pg 21	7824.5068.0
16B «77 x 27»	M 32	7816.5169.0	10B «57 x 27»	M 32	7810.7693.0	32B «77 x 62»		7832.5057.0	24B «104 x 27»	Pg 29	7824.5069.0
16B «77 x 27»	M 32X2	7816.5170.0	16B «77 x 27»	M 25	7816.7694.0						
16B «77 x 27»	M 40	7816.5171.0	16B «77 x 27»	M 32	7816.7695.0						
16B «77 x 27»	M 40X2	7816.5172.0	24B «104 x 27»	M 25	7824.7696.0						
16B «77 x 27»	Pg 21	7816.5173.0	24B «104 x 27»	M 32	7824.7697.0						
16B «77 x 27»	Pg 21X2	7816.5174.0									
16B «77 x 27»	Pg 29	7816.5175.0									
16B «77 x 27»	Pg 29X2	7816.5176.0									
24B «104 x 27»	M 32	7824.5178.0									
24B «104 x 27»	M 32X2	7824.5179.0									
24B «104 x 27»	M 40	7824.5180.0									
24B «104 x 27»	M 40X2	7824.5181.0									
24B «104 x 27»	Pg 21	7824.5182.0									
24B «104 x 27»	Pg 21X2	7824.5183.0									
24B «104 x 27»	Pg 29	7824.5184.0									
24B «104 x 27»	Pg 29X2	7824.5185.0									
Type: STD for inserts up to 500V S-D, S-DD, S-E, S-ES, S-ESHV, S-EE, S-HSB, S-K, S-M series						For more technical details and STD-HV, HE, HE-HV, EMC types, please consult the Westec General Catalogue			Accessories, cable glands and tools see page: 36 ÷ 42		

32

IP65 cable glands metal type for MIC hoods (1,2)			IP65 cable glands with cylindrical body (2,3)			IP68 metal cable glands- 5 bar (2,4)			IP68 metal cable glands (2,4)		
Metal type 			With gasket 								
Plastic type 			With hexagonal part 								
Cable Dia mm.	Thread	Part No.	Cable Dia mm.	Thread	Part No.	Cable Dia A	Thread	Part No.	Cable Dia A	Thread	Part No.
3.5 - 12.5 8 - 17 15.5 - 24.5 22.5 - 31.5 29.5 - 38.5	M 20x1,5 M 25x1,5 M 32x1,5 M 40x1,5 M 50x1,5	Metal type	5 - 7	M 12x1,5	7000.7710.0	4 - 10/6	M 16x1,5	7000.6896.0	3 - 6/6	M 12x1,5	7000.6899.3
			4 - 9.5	M 16x1,5	7000.7711.0	4 - 14/6,5	M 20x1,5	7000.6831.0	5 - 9/6	M 16x1,5	7000.6896.3
			6 - 13	M 20x1,5	7000.7712.0	11 - 18/7	M 25x1,5	7000.6832.0	9 - 13/8	M 20x1,5	7000.6831.3
			6 - 15	M 25x1,5	7000.7713.0	14 - 21/8	M 32x1,5	7000.6833.0	11 - 16/8	M 25x1,5	7000.6832.3
			9 - 20	M 32x1,5	7000.7714.0	19 - 28/9	M 40x1,5	7000.6834.0	14 - 21/8	M 32x1,5	7000.6833.3
			15 - 27	M 40x1,5	7000.7715.0	24 - 38/9	M 50x1,5	7000.3535.0	19 - 27/9	M 40x1,5	7000.6834.3
			21 - 33	M 50x1,5	7000.7716.0	4 - 10/6	Pg 11	7000.6825.0	24 - 35/9	M 50x1,5	7000.6835.3
			30 - 45	M 63x1,5	7000.7717.0	5 - 12/6,5	Pg 13.5	7000.6826.0	39 - 48/12	M 63x1,5	7000.6836.3
			4 - 9.5	Pg 9	7000.7701.0	8 - 14/6,5	Pg 16	7000.6827.0	6 - 6,5/6	Pg 7	7000.6900.3
			4 - 11	Pg 11	7000.7702.0	11 - 18/7	Pg 21	7000.6828.0	4 - 8/6	Pg 9	7000.6901.3
7 - 12 7 - 12 7 - 14.5 9.5 - 18.5 17.5 - 26.5 23.5 - 32.5 29.5 - 38.5	Pg 11 Pg 13.5 Pg 16 Pg 21 Pg 29 Pg 36 Pg 42		6 - 13	Pg 13.5	7000.7703.0	16 - 25/8	Pg 29	7000.6829.0	6 - 10/6	Pg 11	7000.6825.3
			6 - 15	Pg 16	7000.7704.0	19 - 36/9	Pg 36	7000.6830.0	6 - 12/8	Pg 13.5	7000.6826.3
			9 - 20	Pg 21	7000.7705.0	30 - 38/9	Pg 42	7000.6897.0	10 - 13/6,5	Pg 16	7000.6827.3
			15 - 27	Pg 29	7000.7706.0				14 - 18/7,5	Pg 21	7000.6828.3
			21 - 33	Pg 36	7000.7707.0				20 - 25/8	Pg 29	7000.6829.3
			27 - 40	Pg 42	7000.7708.0				22 - 32/8	Pg 36	7000.6830.3
			30 - 45	Pg 48	7000.7709.0				32 - 38/12	Pg 42	7000.6897.3
					With hexagonal part				37 - 44/12	Pg 48	7000.6898.3
			5 - 7	M 12x1,5	7000.7730.0						
			4 - 9.5	M 16x1,5	7000.7731.0						
3.5 - 12.5 7 - 12	M 20x1,5 Pg 11x1,5	Plastic type	6 - 13	M 20x1,5	7000.7732.0						
			6 - 15	M 25x1,5	7000.7733.0						
			9 - 20	M 32x1,5	7000.7734.0						
			15 - 27	M 40x1,5	7000.7735.0						
			21 - 33	M 50x1,5	7000.7736.0						
			30 - 45	M 63x1,5	7000.7737.0						
			4 - 9.5	Pg 9	7000.7721.0						
			4 - 11	Pg 11	7000.7722.0						
			6 - 13	Pg 13.5	7000.7723.0						
			6 - 15	Pg 16	7000.7724.0						
3.5 - 12.5 7 - 12	M 25x1,5 Pg 11x1,5	Black color	9 - 20	Pg 21	7000.7725.0						
			15 - 27	Pg 29	7000.7726.0						
			21 - 33	Pg 36	7000.7727.0						
			27 - 40	Pg 42	7000.7728.0						
			30 - 45	Pg 48	7000.7729.0						
1 - For industrial connectors hoods/housings			2 - For more details please consult the Westec General Catalogue			3 - For any sealed enclosures and boxes to protect parts, mechanisms and equipments from atmospheric agents			4 - For industrial connectors hoods/housings where higher protection and pulling strength are required. For sealed enclosures and boxes		

IP68 plastic cable glands (1,2,3)			IP68 plastic cable glands with nut and gasket (1,2,3)			IP68 plastic cable glands (1,2,3)			Metal and plastic nuts (2,3,4)										
																			
Cable Dia L	Thread	Part No.	Cable Dia L	Thread	Part No.	Thread L	L	Part No.	H	Thread	Part No.								
3-6,5/11	M 12x1,5	7000.7821.0	3-6,5/11	M 12x1,5	7000.7821.5	3-6/9	M 12x1,5	7000.7122.0	2.80 2.80 3.00 3.50 4.00 5.00 5.00 6.00 2.80 2.80 3.00 3.00 3.00 3.50 4.00 5.00 5.00 5.00 5.50 5 5 5,5 6 6,5 8 8,5 9 5 5 5,5 5,5 6 6 7,5 8,5 8,5 8,5	Metal type									
4-8/11	M 16x1,5	7000.7822.0	4-8/11	M 16x1,5	7000.7822.5	4-8/10	M 16x1,5	7000.7123.0		M 12	7000.6950.0								
6-11/10,2	M 20x1,5	7000.7823.0	6-11/12,7	M 20x1,5	7000.7823.5	6-10,7/11,2	M 20x1,5	7000.7124.0		M 16	7000.6951.0								
9-15/12	M 25x1,5	7000.7824.0	9-15/13	M 25x1,5	7000.7824.5	12-15,8/12	M 25x1,5	7000.7125.0		M 20	7000.6952.0								
12-21/14	M 32x1,5	7000.7825.0	12-21/14	M 32x1,5	7000.7825.5	3-6/9 4-8/8 5-10/9 6-12/10 10-14/11 12-15,8/12	Pg 7 Pg 9 Pg 11 Pg 13.5 Pg 16 Pg 21	7000.7127.0 7000.7128.0 7000.7129.0 7000.7130.0 7000.7131.0 7000.7132.0 For black color please replace digit "0" with "1"		M 25	7000.6953.0								
22-32/17	M 40x1,5	7000.7826.0	22-32/17	M 40x1,5	7000.7826.5					M 32	7000.6954.0								
30-38/20	M 50x1,5	7000.7827.0	30-38/20	M 50x1,5	7000.7827.5					M 40	7000.6955.0								
35-44/20	M 63x1,5	7000.7828.0	35-44/20	M 63x1,5	7000.7828.5					M 50	7000.6956.0								
3-6,5/11	Pg 7	7000.7829.0	3-6,5/11	Pg 7	7000.7829.5					M 63	7000.6967.0								
4-8/10,2	Pg 9	7000.7830.0	4-8/10,2	Pg 9	7000.7830.5					Pg 7	7000.6965.0								
5-10/10,2	Pg 11	7000.7831.0	5-10/12,3	Pg 11	7000.7831.5					Pg 9	7000.6966.0								
6-11/12	Pg 13.5	7000.7832.0	6-11/13	Pg 13.5	7000.7832.5					Pg 11	7000.6967.0								
9-13/12	Pg 16	7000.7833.0	9-13/13	Pg 16	7000.7833.5					Pg 13.5	7000.6968.0								
13-18/12	Pg 21	7000.7834.0	13-18/15,2	Pg 21	7000.7834.5					Pg 16	7000.6969.0								
17,5-25/14,5	Pg 29	7000.7835.0	17,5-25/14,5	Pg 29	7000.7835.5					Pg 21	7000.6970.0								
22-32/16,8	Pg 36	7000.7836.0	22-32/16,8	Pg 36	7000.7836.5	For black color please replace digit "0" with "1"				Pg 29	7000.6971.0								
32-38/16,8	Pg 42	7000.7837.0	32-38/16,8	Pg 42	7000.7837.5					Pg 36	7000.6972.0								
37-44/18	Pg 48	7000.7838.0	37-44/18	Pg 48	7000.7838.5					Pg 42	7000.6973.0								
For black color please replace digit "0" with "1"			For black color please replace digit "0" with "1"							Pg 48	7000.6974.0								
										Plastic type									
										5	M 12x1,5	7000.7841.0							
										5	M 16x1,5	7000.7842.0							
										5,5	M 20x1,5	7000.7843.0							
										6	M 25x1,5	7000.7844.0							
										6,5	M 32x1,5	7000.7845.0							
										8	M 40x1,5	7000.7846.0							
										8,5	M 50x1,5	7000.7847.0							
										9	M 63x1,5	7000.7848.0							
										5	Pg 7	7000.7849.0							
										5	Pg 9	7000.7850.0							
										5,5	Pg 11	7000.7851.0							
										5,5	Pg 13.5	7000.7852.0							
										6	Pg 16	7000.7853.0							
										6	Pg 21	7000.7854.0							
										7,5	Pg 29	7000.7855.0							
										8,5	Pg 36	7000.7856.0							
										8,5	Pg 42	7000.7857.0							
										8,5	Pg 48	7000.7858.0							
1 - For any sealed enclosures and boxes to protect parts, mechanisms and equipments from atmospheric agents			CE RoHS 2 - For more details please consult the Westec General Catalogue			3 - Color Grey or Black. Please replace digit "0" of Part.No. with "1"			4 - For metal and plastic glands and any other metal or plastic threaded fittings										

Metal enlarging adapters Threaded extension tubes (1-2)			NPT adapters (2-3)			Metal blanking plugs with gaskets (2-4)				Reducers (1-2)			
													
Thread	L	Part No.	Male thread	NPT Female thread	Part No.	L	D	Thread	Part No.	A	D	Thread	Part No.
Enlargers			M 20 x 1,5	1/2"	7000.6942.0			Metal type		7	27	M 25 - M 20	7000.7791.0
M 16 - M 20	11,5	7000.7771.0	M 25 x 1,5	1/2"	7000.6943.0	5	14	M 12x1.5	7000.7780.0	8	34	M 32 - M 25	7000.7792.0
M 20 - M 25	12,5	7000.6870.0	M 25 x 1,5	3/4"	7000.6944.0	6	18	M 16x1.5	7000.7781.0	8	43	M 40 - M 32	7000.7793.0
M 25 - M 32	12,5	7000.6871.0	M 32 x 1,5	3/4"	7000.6945.0	6,5	22	M 20x1.5	7000.6975.0	9	53	M 50 - M 40	7000.7794.0
M 32 - M 40	16,0	7000.6872.0	M 32 x 1,5	1"	7000.6946.0	7,0	27	M 25x1.5	7000.6976.0				
M 40 - M 50	22,0	7000.6873.0	M 32 x 1,5	1 1/4"	7000.6947.0	8	34	M 32x1.5	7000.6977.0	6.5	22	Pg 13.5 - Pg 11	7000.7795.0
M 50 - M 63	14,5	7000.7772.0	M 32 x 1,5	1 1/4"	7000.6948.0	9	44	M 40x1.5	7000.6978.0	6.5	24	Pg 16 - Pg 13.5	7000.7796.0
			M 40 x 1,5	1 1/4"	7000.6948.0	10	54	M 50x1.5	7000.6979.0	7	30	Pg 21 - Pg 16	7000.7797.0
			M 50 x 1,5	1 1/2"	7000.6949.0	10	67	M 63x1.5	7000.7785.0	8	39	Pg 29 - Pg 21	7000.7798.0
Pg 9 - Pg 11	10,5	7000.7775.0				5,2	14	Pg 7	7000.7783.0	9	50	Pg 36 - Pg 29	7000.7799.0
Pg 11 - Pg 13.5	11,5	7000.6865.0	Pg 11	3/8"	7000.6928.0	6	17	Pg 9	7000.7784.0	10	57	Pg 42 - Pg 36	7000.7800.0
Pg 13.5 - Pg 16	12,5	7000.6866.0	Pg 11	1/2"	7000.6929.0	6	20	Pg 11	7000.6980.0	10	64	Pg 48 - Pg 42	7000.7801.0
Pg 16 - Pg 21	14,5	7000.6867.0	Pg 13.5	1/2"	7000.6930.0	6,5	22	Pg 13.5	7000.6981.0				
Pg 21 - Pg 29	16,0	7000.6868.0	Pg 16	1/2"	7000.6931.0	7	30	Pg 16	7000.6982.0				
Pg 29 - Pg 36	20,0	7000.6869.0	Pg 21	1/2"	7000.6932.0	8	39	Pg 21	7000.6983.0				
Pg 36 - Pg 42	23,0	7000.6971.0	Pg 21	3/4"	7000.6933.0	9	50	Pg 29	7000.6984.0				
Pg 42 - Pg 48	23,0	7000.6972.0	Pg 29	1"	7000.6934.0	10	57	Pg 36	7000.6985.0				
			Pg 29	1 1/4"	7000.6935.0	10	64	Pg 42	7000.6986.0				
			Pg 36	1 1/4"	7000.6936.0			Pg 48	7000.7786.0				
			Pg 42	1 1/2"	7000.6937.0			Plastic type					
M 20 - M 20	14	7000.6788.0				8,5	15	M 12x1.5	7000.7310.0				
M 25 - M 25	15	7000.6791.0				8,5	19	M 16x1.5	7000.7311.0				
M 32 - M 32	16,5	7000.6792.0				9	25	M 20x1.5	7000.7312.0				
M 40 - M 40	19,5	7000.6793.0				10,5	30	M 25x1.5	7000.7313.0				
M 50 - M 50	22	7000.6794.0				10,5	38	M 32x1.5	7000.7314.0				
						11,5	46	M 40x1.5	7000.7315.0				
						13,5	56	M 50x1.5	7000.7316.0				
						14	68	M 63x1.5	7000.7317.0				
Pg 16 - Pg 16	14	7000.6789.0				8,5	15	Pg 7	7000.7320.0				
Pg 21 - Pg 21	15	7000.6796.0				8,5	19	Pg 9	7000.7321.0				
Pg 29 - Pg 29	16,5	7000.6797.0				9	22	Pg 11	7000.7322.0				
Pg 36 - Pg 36	19,5	7000.6798.0				9	25	Pg 13.5	7000.7323.0				
Pg 42 - Pg 42	22	7000.6799.0				10,5	27	Pg 16	7000.7324.0				
						10,5	33	Pg 21	7000.7325.0				
						11,5	44	Pg 29	7000.7326.0				
						13,5	55	Pg 36	7000.7327.0				
						13,5	62	Pg 42	7000.7328.0				
						14,5	68	Pg 48	7000.7329.0				
1 - They allow to couple enclosures and fittings with different threads			 2 - For more details please consult the Westec General Catalogue			3 - They allow to couple the enclosures with Metric or Pg thread to NPT fittings				4 - For blanking any threaded hole in hoods/housings and any other sealed enclosures.			

Description	Part. No.	Description	Part. No.
Single code pin  Stainless steel 7000.6874.0 <td> Bottom gasket for bulkhead housings - Material: NBR For size  3A «21x21» 5871.1896.0 10A «49x16» 5121.0190.0 16A «66x16» 5121.0210.0 32A «66x40» 5121.0330.0 6B «44x27» 5871.1904.0 10B «57x27» 5871.1938.0 16B «77x27» 5871.1854.0 24B «104x27» 5871.1995.0 32B «77x62» 5871.1987.0 48B «104x62» 5871.1961.0 QD «32x13» 5871.2500.0 </td>	Bottom gasket for bulkhead housings - Material: NBR For size  3A «21x21» 5871.1896.0 10A «49x16» 5121.0190.0 16A «66x16» 5121.0210.0 32A «66x40» 5121.0330.0 6B «44x27» 5871.1904.0 10B «57x27» 5871.1938.0 16B «77x27» 5871.1854.0 24B «104x27» 5871.1995.0 32B «77x62» 5871.1987.0 48B «104x62» 5871.1961.0 QD «32x13» 5871.2500.0		
Male code pin  Stainless steel 7000.6875.0 <td></td>			
Female code pin  Stainless steel 7000.6876.0 <td></td>			
	Steel zinc plated 7000.6875.3 <td></td>		
	Steel zinc plated 7000.6876.3 <td></td>		
 Coding cap for female inserts that use 16A contacts. (S-A, S-E, S-EHV series) 5341.2920.0		 ⊕ PE screw for inserts: S-A 10A, 16A , S-D15, S-D25 M 3,5 6121.0008.0	
 Coding pin for female inserts that use 10A crimp contacts S-D, S-DD, S-Q12, S-QD17, S-M series 7000.6881.0		 ⊕ PE screw for inserts: S-E, S-EE, S-ES, S-EHV M 4 6341.0021.0	
 Coding pin for female inserts that use 16A crimp contacts, S-A,S-E, S-EE, S-EHV, S-Q, S-Q5, S-QD8, S-M series 7000.6882.0		 ⊕ PE screw for inserts: S-HSB, S-K M 4 6341.4411.0	
 The identification tags shall be used with the inserts with terminal block S-EAV series. 7000.6886.0	Box	 Inserts fixing screw M 3 5821.3380.0	
Support for inserts with terminal block on DIN rail  7400.6836.0		 Contact screw for S-A 3p/4p inserts M 3 5821.3455.0	
Insert coupling screws for S-EAV inserts  Female 7400.6877.0		 Fixing screw for inserts size 3A, «21x21» M 3 5821.3463.0	
	Male 7400.6878.0 <td></td> <td></td>		
 Extension ground terminal Right 5341.3860.0			
	Left 5341.3340.0 <td></td> <td></td>		
	M4 Assembling screw 5821.3372.0		

Description	Part.No.	Description	Part.No.
Complete crimping tool for machined contacts DIA 1,6 - 2,5 mm with die set and locator 	8500.7925.0	Eight (4+4) indent crimping tool for crimping in accordance with MIL - C - 225 20/1 For machined contacts for wires 0,14÷6mm²/ 26-10AWG 	8500.7930.0
Crimping tool with die set for machined contacts DIA 1,6 - 2,5 mm² 	8500.7922.0	Recommended type for contact for wire section 0,14 ÷ 0,35 mm²	
Die set 	For wire section: 0,14 ÷ 4,0 mm² 8500.7926.0	Removal tools for contacts DIA 1,6 mm (10A) 	8500.7940.0
	1,5 ÷ 6,0 mm² 8500.7927.0	Removal tools for contacts DIA 2,5 mm (16A) 	8500.7945.0
Locator 	For contacts Dia.: 1,6 ÷ 2,5 mm 8500.7931.0		
	For contacts Dia.: 4,0 mm 8500.7932.0	Professional crimping tool for bush terminals 	8500.7909.0
Complete crimping tool for single stamped contacts 	8500.7921.0		8500.7910.0
	- Die set for wire section 0,14 ÷ 0,5 mm² 8500.7950.0 0,5 ÷ 1,5 mm² 8500.7951.0 1,5 ÷ 2,5 mm² 8500.7952.0		
Locator 	8500.7955.0	Crimping toggle press MOD. GW12KN	
		Toggle press without crimping dies 8500.7970.0	
		Toggle press with crimping dies and locator for machined contacts DIA 1,6 - 2,5 mm² for wire section 0,14 to 4,0 mm² 8500.7971.0	
Crimping tool with die set: 	8500.7960.0	Pneumatic crimping machine Mod. GW25KN 	8500.7980.0
	- Die set for wire section 0,14 ÷ 0,5 mm² 8500.7965.0 0,5 ÷ 1,5 mm² 8500.7966.0 1,5 ÷ 2,5 mm² 8500.7967.0	Crimping machine without crimping dies	

For more technical details please consult the Westec General Catalogue